

Mural series: Surface wiring devices



Conductive materials made by CuSn94

Silver contacts (AgNi90/10)

Input trunking 10x16, 10x20, 16x16

Easy installation


850°C GWT



850°C

PC

Polycarbonate

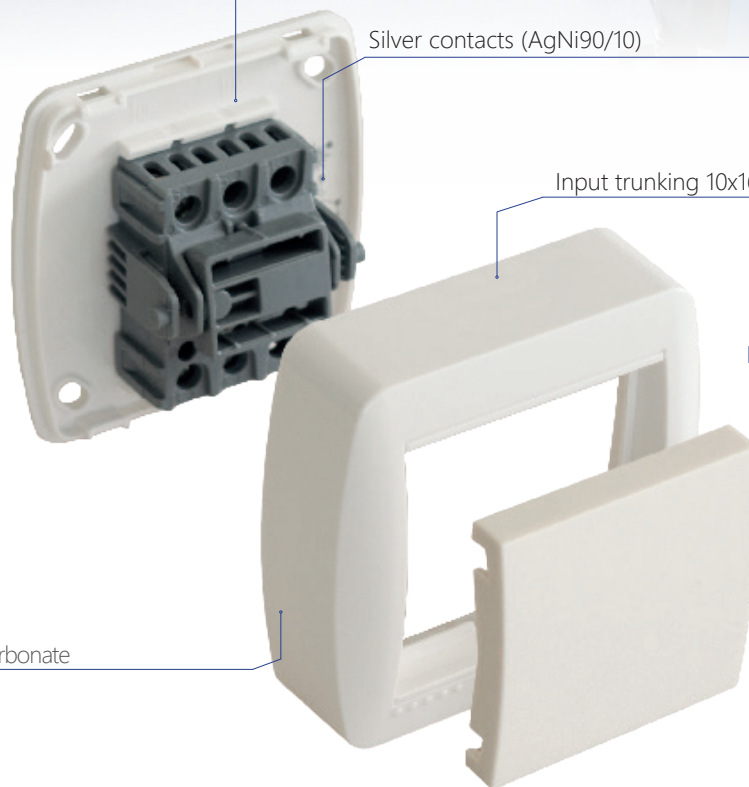

Technical information

- Complies with Directive 2014/35/EU & 2011/65/EU (RoHS).
- Manufactured under EN 60669.
- Silver contacts (AgNi90/10).
- Made of polycarbonate.
- Input trunking 10x16, 10x20, 16x16.
- Halogen free.
- Dimensions: Width x Height x Depth (mm).



MUR02U. 2-way switch.
MUR22U. 2-pole switch



MUR12U. Double 2-way switch.



MUR03U. Bell push button.



MUR04U. Light push button.



MUR021LU. Lighted 2-way switch.



MUR09U. Crossover switch.



MUR60U. Socket 2P+E.



MUR07U*. Socket 2P.



MUR66U. Double socket 2P+E.



MUR36U. Socket + double 2-way switch.



MUR63U. Socket + 2-way switch.
MUR96U. With crossover switch.



MUR84U. Telephone connector. RJ11.



MUR94U. TV connector.



MUR88U. Data connector RJ45.
MUR87U. Data connector RJ45. Cat 6.



MUR62U. Junction box.
MUR64U. Double junction box.



MUR02/2U. 2-way switch.
MUR03/2U. Light push button.

Solera

Portalámparas y Accesorios Solera S.A. - C/ Villa de Madrid, 53
46988 Paterna (Valencia) España-Spain
solera@psolera.com - export@psolera.com

www.psolera.com

