

Residual Current Circuit-Breaker 4P, 63A. AC class.  
Sensitivity 300 mA

Residual Current Circuit-Breaker 4P, 63A. AC Class. Sensitivity 300 mA 4 modules. 240/415V AC (50 - 60 Hz). Breaking capacity 6kA.  
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

|                                     |                          |
|-------------------------------------|--------------------------|
| Mechanical durability               | 15.000 cycles            |
| Protection type (modular)           | Diferential switch       |
| No. of poles                        | 3P + N                   |
| Modules (18 mm)                     | 4                        |
| Neutral position                    | Left                     |
| Network type                        | Alternating current (ac) |
| Sensitivity (Leakage current)       | 300 mA                   |
| Short circuit capacity              | 6 kA                     |
| Protection type                     | Class AC                 |
| Delay type                          | Instant (No delay)       |
| Fixation                            | 35mm DIN rail            |
| Connection capacity                 | Up to 35 mm²             |
| Possibility of using pin type combs | Yes                      |
| Nominal current                     | 63A                      |
| Nominal voltage                     | 230/400 Vca - (50/60 Hz) |

Technical data

|                               |                |
|-------------------------------|----------------|
| Fire resistance (GWEPT)       | 960 °C         |
| Ambient operating temperature | -5 °C ; +40 °C |

|                  |     |
|------------------|-----|
| Free of halogens | Yes |
|------------------|-----|

Regulations

|                                                                     |                     |
|---------------------------------------------------------------------|---------------------|
| CE marking                                                          | Yes                 |
| UK marking                                                          | Yes                 |
| CMim marking                                                        | Yes                 |
| According to Regulations UNE/EN                                     | UNE-EN 61008-1:2013 |
| According to REBT                                                   | Yes                 |
| AENOR certificate                                                   | Yes                 |
| CB certificate                                                      | Yes                 |
| According to European Directive 2014/35 / EU. Low voltage directive | Yes                 |


Sustainability

|                                                    |                                  |
|----------------------------------------------------|----------------------------------|
| According to European Directive 2011/65/UE (RoHS)  | Yes (Complies with UNE EN 50581) |
| According to European Directive 2012/19/UE (RAEE2) | Yes                              |

Logistics and packaging

|                       |                |
|-----------------------|----------------|
| Unit EAN code         | 8423220093614  |
| EAN code container    | 8423220093614  |
| EAN code packaging    | 18423220093611 |
| Units packaging       | 1              |
| Units carton          | 30             |
| Pallet Units          | 900            |
| Packaging Measures cm | 20,5x9,5x25,5  |
| Unit weight (g)       | 433            |
| Container Weight (Kg) | 0,43           |
| Packaging Weight (Kg) | 13,12          |
| Tariff code           | 85362010       |

## Sketch

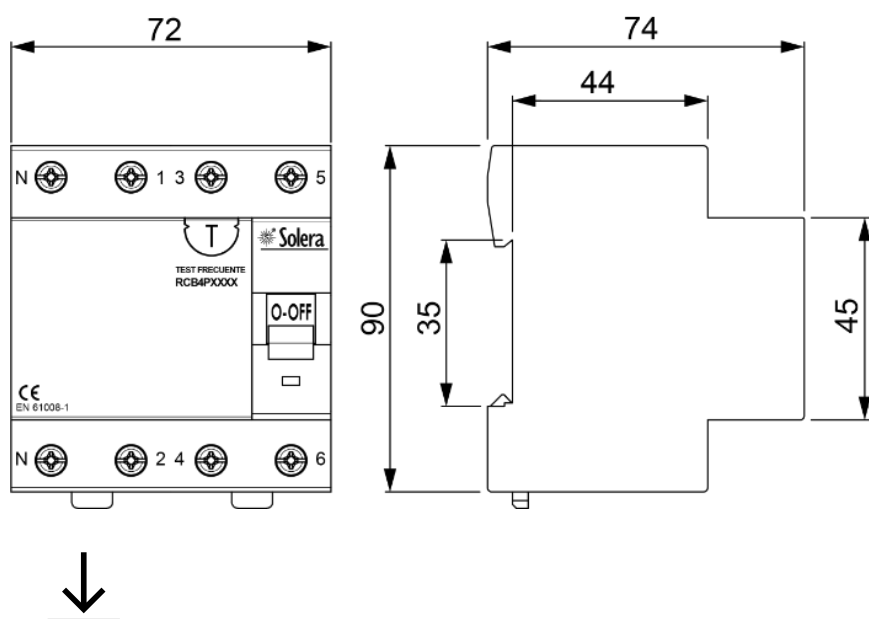

## Documentation and downloads



[Assembly instructions \(0.24MB\)](#)



[Certificate \(0.72MB\)](#)