

Multiple socket of 6 sockets 2P+E, (french system)
16A 250V~With light switch. MÁX. 3680W.

Multiple socket of 6 sockets 2P+E, (french system) 16A 250V~. With light switch.MAX. 3680W. 850° C GWT White colour. Easy cable connection. Inputs for 7 x 12, 10 x 16, 10 x 20 and 12 x 12 mm mini-trunking. Quick and easy removal lid. With holes for fixing by screws to the wall and orifice for fixing by means of flanges to tubes. Includes rubber grommet for cable and cover for mini trunking. Made of Polycarbonate. Serie L` ION.

Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Type	Multiple base
No. of bases	6
Basic characteristics	2P+E, 16A 250V~
Maximum power	3.680 W
Light switch	Yes
Terminal system	Screw connection
Mini trunking input	Yes, for 7x12, 10x16, 10x20 and 12x12
Possibility of using hanger	Yes
Possibility of using KIT-DIN35	Yes
Wall fixing holes	Yes

Technical data

Protection Degree (IP)	IP20
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Ambient operating temperature	-5 °C ; +60 °C
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations	NF C61-314
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220226050
EAN code container	8423220225817
EAN code packaging	18423220225814
Units packaging	10
Units carton	40
Pallet Units	1600
Packaging Measurements cm	31,1x10,3x20,4
Packaging Measures cm	43,5x34,5x22,5
Unit weight (g)	300
Container Weight (Kg)	3,14
Packaging Weight (Kg)	13,17
Tariff code	85366990

Sketch

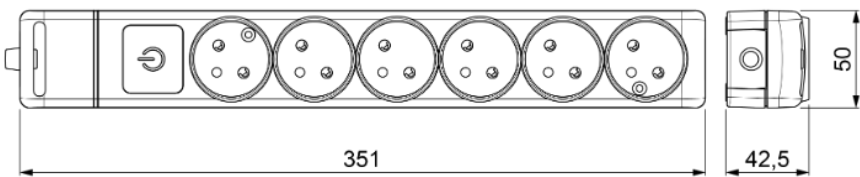



Documentation and downloads



[Assembly instructions \(0.92MB\)](#)