

## Motor protection 4 – 6,3 A

Motor protection 4– 6,3A Thermal, magnetic and phase failure protection.  
Módulos. 2,5. 4 a 6,3 KW en AC3 230 V.



## Features

Common applications	Industrial environments (factories, warehouses, etc.)
Protection type (modular)	Motor guard
No. of poles	3P
Modules (18 mm)	2.5
Network type	Alternating current (ac)
Fixation	35mm DIN rail
Nominal current	4 a 6,3 A
Nominal voltage	230/400 Vca - (50/60 Hz)

## Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes

According to Regulations UNE/EN	UNE-EN 60947-4-1:2021
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

## Logistics and packaging

Unit EAN code	8423220066205
EAN code container	8423220066205
EAN code packaging	18423220066202
Units packaging	1
Units carton	50
Pallet Units	1500
Packaging Measures cm	44x21x28,5
Unit weight (g)	253
Container Weight (Kg)	0,253
Packaging Weight (Kg)	13,208
Tariff code	85362010

## Sketch

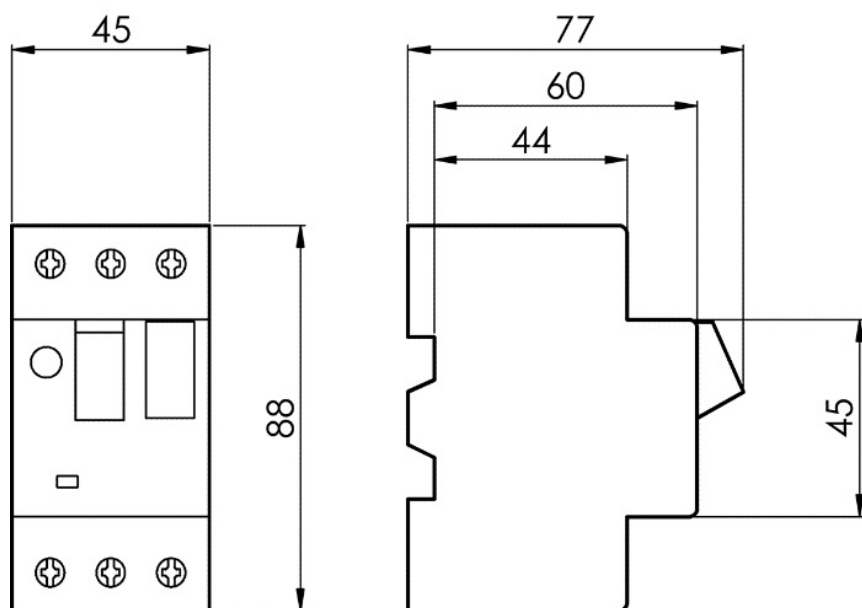

## Documentation and downloads



Safety Information (0.38MB)