

Transient surge protection. 230/400V AC (50 - 60 Hz).

Transient surge protection. 230/400V AC (50 - 60 Hz). 3P+N. 400/230V. 20 kA. 275 Vc. D curve. Triphasic. 4 modules



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Protection type (modular)	Transient surge protector
No. of poles	3P + N
Modules (18 mm)	4
Network type	Alternating current (ac)
Fixation	35mm DIN rail
Nominal voltage	400 Vca - (50/60 Hz)

Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 61643-11:2013
According to Regulations IEC	IEC 61643-11-2011

In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
--	-----

According to European Directive 2014/35 / EU. Low voltage directive	Yes
---	-----

Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
---	-----

According to European Directive 2012/19/UE (RAEE2)	Yes
--	-----

According to Regulations (RoHS)	UNE-EN IEC 63000:2022
---------------------------------	-----------------------

Logistics and packaging

Unit EAN code	8423220066199
---------------	---------------

EAN code container	8423220066199
--------------------	---------------

EAN code packaging	18423220066196
--------------------	----------------

Units packaging	1
-----------------	---

Units carton	30
--------------	----

Pallet Units	1350
--------------	------

Packaging Measures cm	43x24x34
-----------------------	----------


Unit weight (g)	428
-----------------	-----

Container Weight (Kg)	0,428
-----------------------	-------

Packaging Weight (Kg)	13,365
-----------------------	--------

Tariff code	85362010
-------------	----------

Sketch

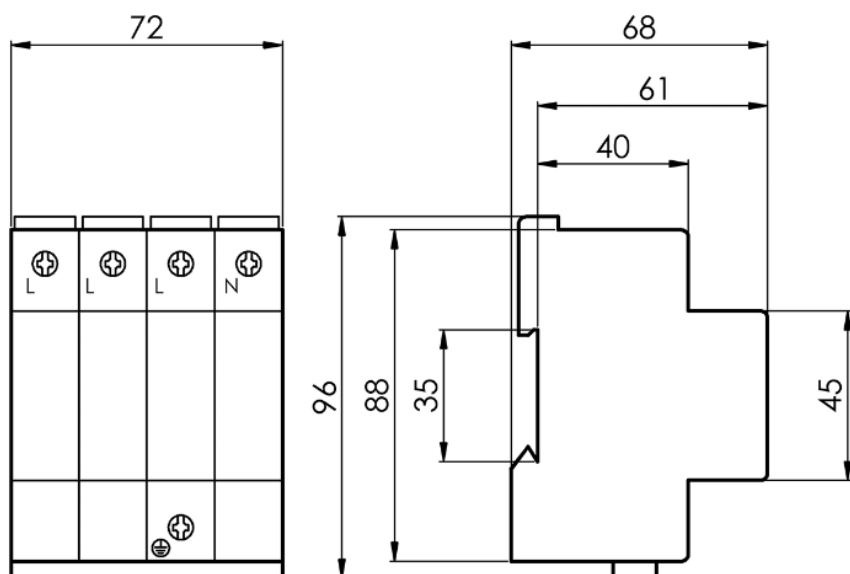

Documentation and downloads



Safety Information (0.38MB)