

Miniature circuit breaker 1P+N 25A 6kA C curve

Miniature circuit breaker 1P+N for residential and tertiary installations, rated at 25A, 6kA breaking capacity and C curve. 2-module format for 230V AC networks (50/60Hz).



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	20.000 cycles
Protection type (modular)	Magnetothermic switch
No. of poles	1P + N
Modules (18 mm)	2
Neutral position	Left
Network type	Alternating current (ac)
Trigger curve	C
Short circuit capacity	6 kA
Fixation	35mm DIN rail
Connection capacity	Up to 25 mm ²
Possibility of using pin type combs	Yes
Nominal current	25A
Nominal voltage	230 Vca - (50/60 Hz)

Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60898-1:2020 (versión corregida Febrero 2024).
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220262683
EAN code container	8423220262676
EAN code packaging	18423220262673
Units packaging	6
Units carton	120
Pallet Units	3600
Packaging Measurements cm	22,4x8x7,8
Packaging Measures cm	43x24x34
Unit weight (g)	161,6
Container Weight (Kg)	1,0692
Packaging Weight (Kg)	21,909
Tariff code	85362010

Sketch

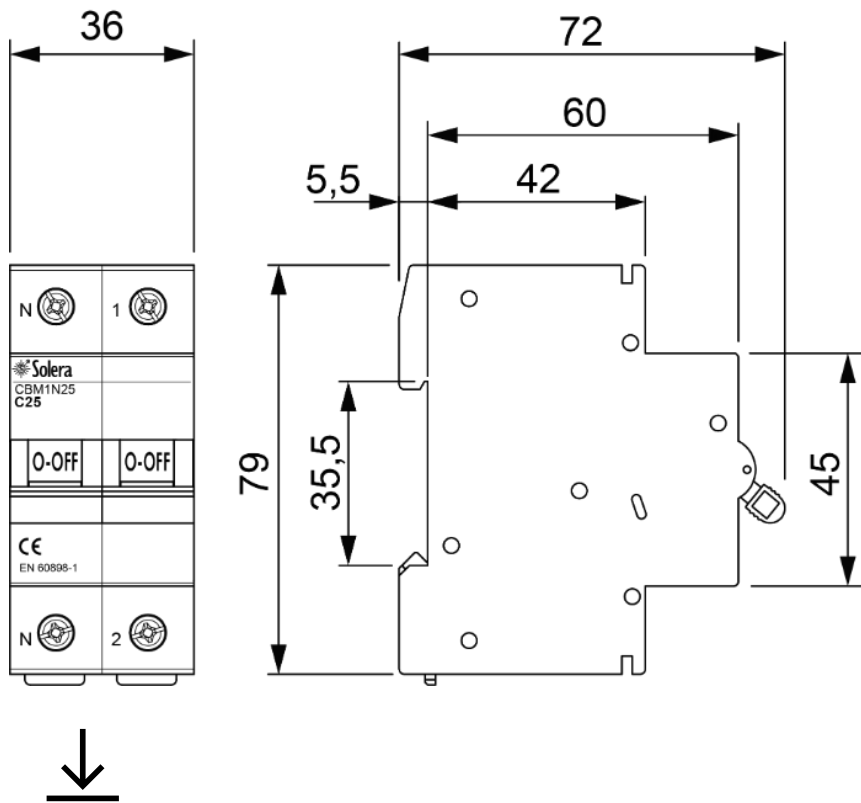

Documentation and downloads



Assembly instructions (0.26MB)



Safety Information (0.38MB)