

## Miniature Circuit Breaker 1P+N, 20A. Breaking capacity 6kA. C curve.

Miniature Circuit Breaker 1P+N, 20A. Breaking capacity 6kA. C curve. 2 modules.  
230V AC (50 - 60 Hz).



### Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	20.000 cycles
Protection type (modular)	Magnetothermic switch
No. of poles	1P + N
Modules (18 mm)	2
Neutral position	Left
Network type	Alternating current (ac)
Trigger curve	C
Short circuit capacity	6 kA
Fixation	35mm DIN rail
Connection capacity	Up to 25 mm <sup>2</sup>
Possibility of using pin type combs	Yes
Nominal current	20A
Nominal voltage	230 Vca - (50/60 Hz)

### Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60898-1:2020 (versión corregida Febrero 2024).
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
AENOR certificate	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022


## Logistics and packaging

Unit EAN code	8423220093188
EAN code container	8423220091702
EAN code packaging	18423220091709
Units packaging	6
Units carton	120
Pallet Units	3600
Packaging Measurements cm	22,4x8x7,8
Packaging Measures cm	43x24x34
Unit weight (g)	161,6
Container Weight (Kg)	1,0242
Packaging Weight (Kg)	21,009

Tariff code

85362010

## Sketch

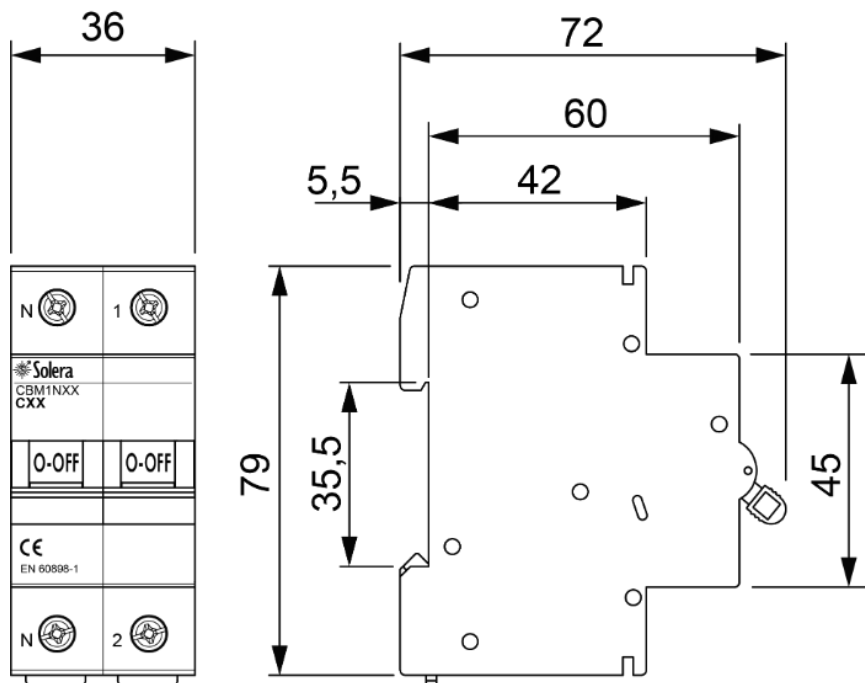

## Documentation and downloads



Assembly instructions (0.26MB)



Safety Information (0.38MB)