

## Miniature Circuit Breaker 1P+N, 25A. Breaking capacity 6kA. C curve.

Miniature Circuit Breaker 1P+N, 25A. Breaking capacity 6kA. C curve. 1 module.  
230V AC (50 - 60 Hz).



### Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	20.000 cycles
Protection type (modular)	Magnetothermic switch
No. of poles	1P + N
Modules (18 mm)	1
Neutral position	Left
Network type	Alternating current (ac)
Trigger curve	C
Short circuit capacity	6 kA
Fixation	35mm DIN rail
Possibility of using pin type combs	Yes
Nominal current	25A
Nominal voltage	230 Vca - (50/60 Hz)

### Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60898-1:2020 (versión corregida Febrero 2024).
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

## Logistics and packaging

Unit EAN code	8423220093119
EAN code container	8423220091634
EAN code packaging	18423220091631
Units packaging	12
Units carton	180
Pallet Units	8100
Packaging Measurements cm	22,4x8x7,8
Packaging Measures cm	43x24x34
Unit weight (g)	125,6
Container Weight (Kg)	1,7172
Packaging Weight (Kg)	26,283
Tariff code	85362010

## Sketch

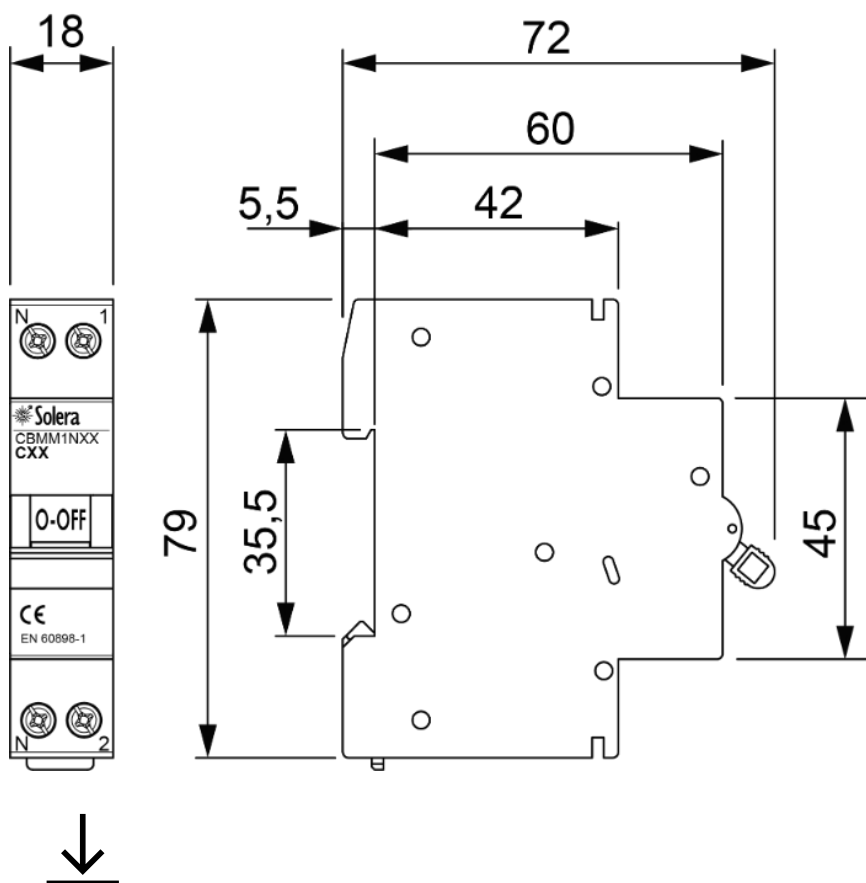

## Documentation and downloads



Assembly instructions (0.26MB)



Safety Information (0.38MB)