

Transient surge protection. 230/400V AC (50 - 60 Hz).

Transient surge protection. 230/400V AC (50 - 60 Hz). 3P+N. 400/230V. 20 kA. 275 VC. D curve. Triphasic. 4 modules



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Protection type (modular)	Transient surge protector
No. of poles	3P + N
Modules (18 mm)	4
Network type	Alternating current (ac)
Fixation	35mm DIN rail
Nominal voltage	400 Vca - (50/60 Hz)

Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 61643-11:2013
According to Regulations IEC	IEC 61643-11-2011

In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220066199
EAN code container	8423220066199
EAN code packaging	18423220066196
Units packaging	1
Units carton	30
Pallet Units	1350
Packaging Measures cm	43x24x34
Unit weight (g)	428
Container Weight (Kg)	0,428
Packaging Weight (Kg)	13,365
Tariff code	85362010

Sketch

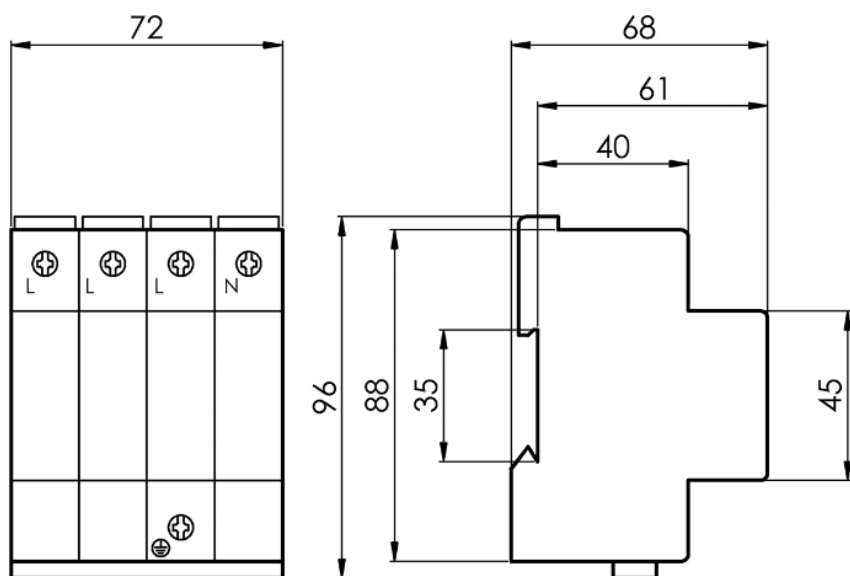

Documentation and downloads



Safety Information (0.38MB)