

Residual Current Circuit-Breaker 4P, 25A. Class A. Sensitivity 30 mA

Residual Current Circuit-Breaker 4P, 25A. Class A. Sensitivity 30 mA 4 modules. 400V AC (50 - 60 Hz). Breaking capacity 6kA.



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	15.000 cycles
Protection type (modular)	Diferential switch
No. of poles	3P + N
Modules (18 mm)	4
Neutral position	Left
Network type	Alternating current (ac)
Sensitivity (Leakage current)	30 mA
Short circuit capacity	6 kA
Protection type	Class A
Delay type	Instant (No delay)
Fixation	35mm DIN rail
Connection capacity	Up to 35 mm ²
Possibility of using pin type combs	Yes
Nominal current	25A
Nominal voltage	400 Vca - (50/60 Hz)

Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C

Free of halogens	Yes
------------------	-----

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 61008-1:2013;UNE-EN IEC 61543:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
AENOR certificate	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022
According to European Directive 2014/30/UE. (CEM)	Yes

Logistics and packaging

Unit EAN code	8423220093652
EAN code container	8423220093652
EAN code packaging	18423220093659
Units packaging	1
Units carton	30
Pallet Units	1200
Packaging Measurements cm	9x4x8
Packaging Measures cm	47x43x18
Unit weight (g)	191

Container Weight (Kg)	0,209
Packaging Weight (Kg)	6,884
Tariff code	85362010

Sketch

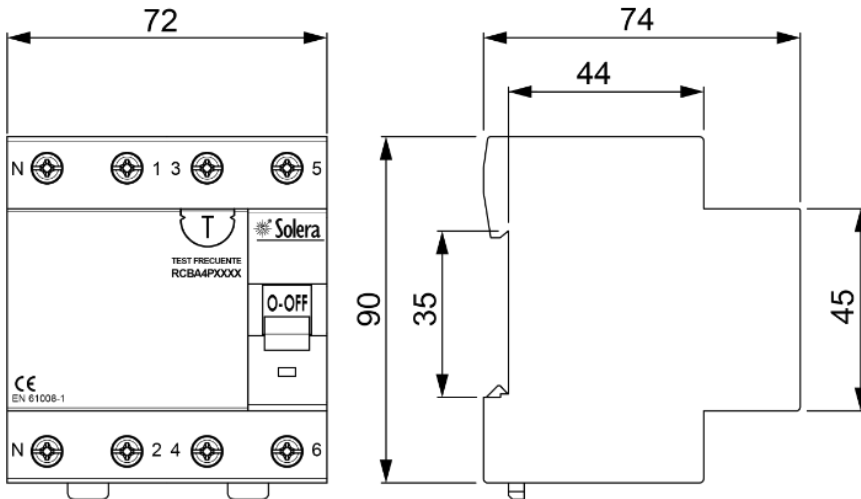

Documentation and downloads



Assembly instructions (0.26MB)



Safety Information (0.38MB)



Certificate (0.72MB)