

Residual Current Circuit-Breaker 4P, 25A. AC class. Sensitivity 30 mA

Residual Current Circuit-Breaker 4P, 25A. AC Class. Sensitivity 30 mA 4 modules. 240/415V AC (50 – 60 Hz). Breaking capacity 6kA.



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	15.000 cycles
Protection type (modular)	Diferential switch
No. of poles	3P + N
Modules (18 mm)	4
Neutral position	Left
Network type	Alternating current (ac)
Sensitivity (Leakage current)	30 mA
Short circuit capacity	6 kA
Protection type	Class AC
Delay type	Instant (No delay)
Fixation	35mm DIN rail
Connection capacity	Up to 35 mm²
Possibility of using pin type combs	Yes
Nominal current	25A
Nominal voltage	400 Vca – (50/60 Hz)

Technical data

Fire resistance (GWEPt)	960 °C
-------------------------	--------

Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 61008-1:2013;UNE-EN IEC 61543:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
AENOR certificate	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022
According to European Directive 2014/30/UE. (CEM)	Yes

Logistics and packaging

Unit EAN code	8423220093539
EAN code container	8423220093539
EAN code packaging	18423220093536
Units packaging	1
Units carton	30
Pallet Units	900
Packaging Measures cm	43x20,5x27
Unit weight (g)	432,8

Container Weight (Kg)	0,4328
Packaging Weight (Kg)	13,122
Tariff code	85362010

Sketch

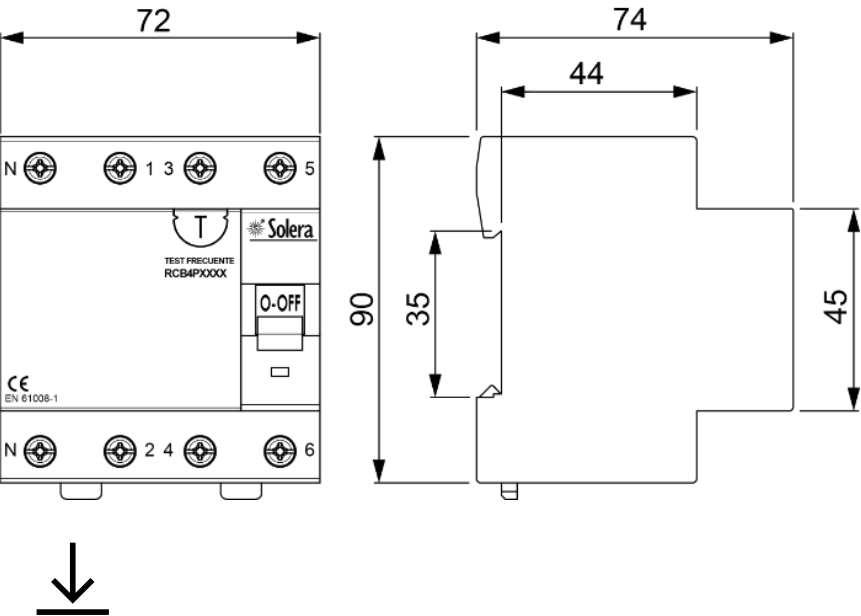

Documentation and downloads

-  Assembly instructions (0.26MB)
-  Certificate (0.72MB)
-  Safety Information (0.38MB)