

Residual Current Circuit-Breaker 4P, 40A. AC class. Sensitivity 30 mA

Residual Current Circuit-Breaker 4P, 40A. AC Class. Sensitivity 30 mA 4 modules.400V AC (50 – 60 Hz). Breaking capacity 6kA.



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanical durability	15.000 cycles
Protection type (modular)	Diferential switch
No. of poles	3P + N
Modules (18 mm)	4
Neutral position	Left
Network type	Alternating current (ac)
Sensitivity (Leakage current)	30 mA
Short circuit capacity	6 kA
Protection type	Class AC
Delay type	Instant (No delay)
Fixation	35mm DIN rail
Connection capacity	Up to 35 mm²
Possibility of using pin type combs	Yes
Nominal current	40A
Nominal voltage	400 Vca - (50/60 Hz)

Technical data

Fire resistance (GWEPT)	960 °C
-------------------------	--------

Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 61008-1:2013;UNE-EN IEC 61543:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
AENOR certificate	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022
According to European Directive 2014/30/UE. (CEM)	Yes

Logistics and packaging

Unit EAN code	8423220093546
EAN code container	8423220093546
EAN code packaging	18423220093543
Units packaging	1
Units carton	30
Pallet Units	900
Packaging Measurements cm	11,8x9,5x8
Packaging Measures cm	43x20,5x27

Unit weight (g)	432
Container Weight (Kg)	0,471
Packaging Weight (Kg)	14,268
Tariff code	85362010

Sketch

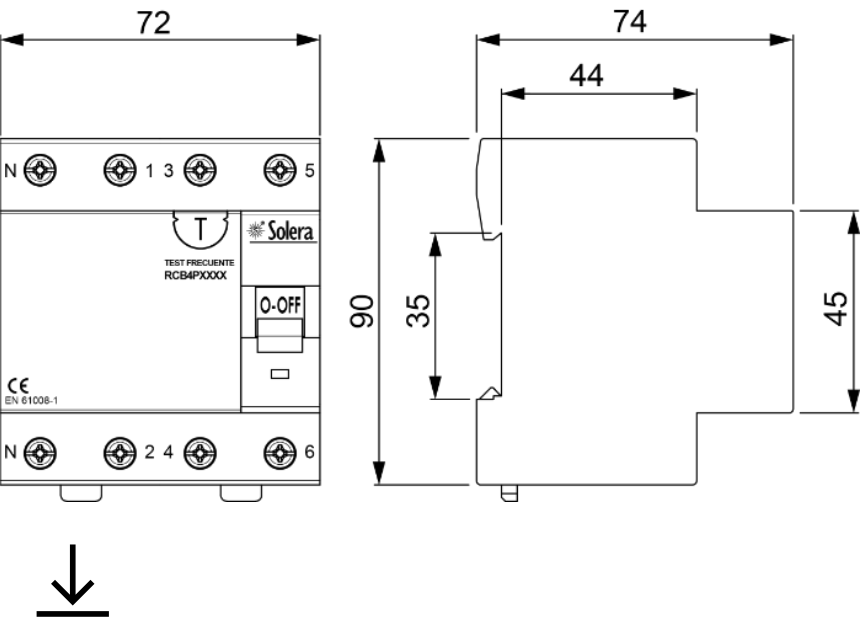

Documentation and downloads

-  Assembly instructions (0.26MB)
-  Certificate (0.72MB)
-  Safety Information (0.38MB)