

## Weekly time switch. Digital.

The digital weekly time switch allows precise scheduling of installation operation. It operates at 230V~, fits two modules, and offers ON-OFF-Timer function. It includes a 3-year reserve, 1-minute minimum time unit, 1NOC contact (16A), and up to 24 programs.



## Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Modular device type	Daily schedule programmer
No. of poles	1P + N
Modules (18 mm)	2
Network type	Alternating current (ac)
Fixation	35mm DIN rail
Reservation	3 years
Contacts	1NO + 1NC
Minimum unit of time that measures	1 minute
Nominal current	16A
Nominal voltage	230 Vca - (50/60 Hz)

## Technical data

Fire resistance (GWEPT)	960 °C
Ambient operating temperature	-5 °C ; +40 °C
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60730-2-7:2020
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

## Logistics and packaging

Unit EAN code	8423220090446
EAN code container	8423220077348
EAN code packaging	18423220077345
Units packaging	6
Units carton	60
Pallet Units	4800
Packaging Measurements cm	9,2x4,5x7
Packaging Measures cm	38,5x23,5x38
Unit weight (g)	138
Container Weight (Kg)	0,8522
Packaging Weight (Kg)	9,025
Tariff code	85362010

## Sketch

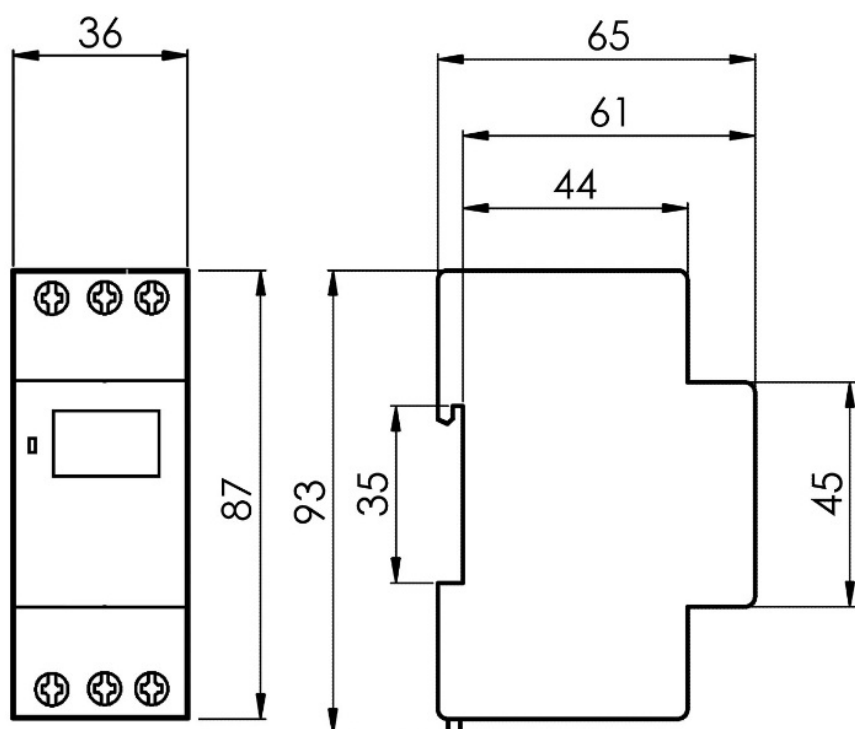

## Documentation and downloads



[Assembly instructions \(0.62MB\)](#)



[Safety Information \(0.38MB\)](#)