6428N

Plug 2P+E 16A 250V~. Black colour.



Plug 2P+E 16A 250V~. Black colour.

Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Material	Thermoplastic
Type	Plug
No. of poles	2P + T
Type of terminal connection	Screw connection
Nominal current	16A
Grounding	Side
PPossibility to use 3x2.5mm² cable	Yes
Nominal current	16A
Nominal voltage	250V~
Color	Black

Technical data

Fire resistance (GWEPT)	650/750 °C
Heat resistance (Ball pressure)	70/125 °C
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes

In accordance with the Regulation (EU) 2023/988 of the European Parliament and of the Council on general product safey	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220079366
EAN code container	8423220061460
EAN code packaging	18423220061467
Units packaging	25
Units carton	400
Pallet Units	14000
Packaging Measurements cm	14,5x8,8x19
Packaging Measures cm	59,5x37,5x20
Unit weight (g)	29,2
Container Weight (Kg)	0,777
Packaging Weight (Kg)	13,012
Tariff code	85366990

Sketch

6428N

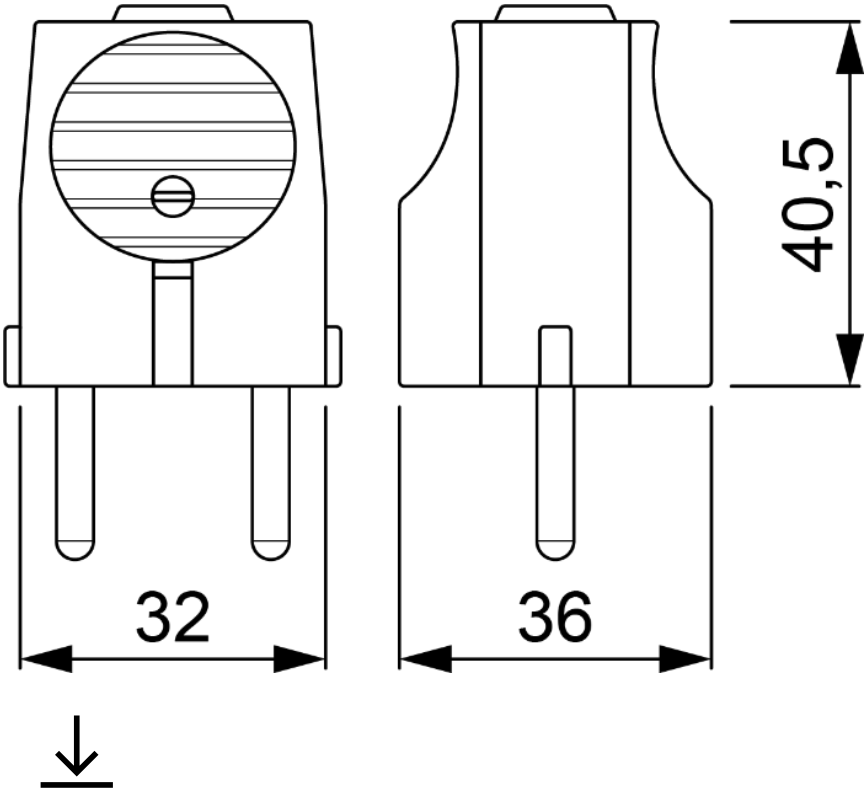

Documentation and downloads

Commercial doc. (0.27MB)

Safety Information (0.38MB)

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com