707C

Mobile socket 2P+E , 16A 250V~. Black rubber.



Mobile socket 2P+E , 16A 250V~. Black rubber.Folding cable clamp for easy connection. IP20

Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Material	Rubber
Type	Mobile socket
No. of poles	2P + T
Type of terminal connection	Screw connection
Nominal current	16A
Grounding	Side
Folding cable tie to facilitate connection	Yes
PPossibility to use 3x2.5mm² cable	Yes
Nominal current	16A
Nominal voltage	250V~
Color	Black-blue

Technical data

Fire resistance (GWEPT)	650/750 °C
Heat resistance (Ball pressure)	70/125 °C
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
In accordance with the Regulation (EU) 2023/988 of the European Parliament and of the Council on general product safey	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220083028
EAN code container	8423220082960
EAN code packaging	18423220082967
Units packaging	14
Units carton	224
Pallet Units	7840
Packaging Measurements cm	14,5x8,8x19
Packaging Measures cm	59,5x37,5x20
Unit weight (g)	51,6
Container Weight (Kg)	0,7694
Packaging Weight (Kg)	12,8904
Tariff code	85366990

Sketch

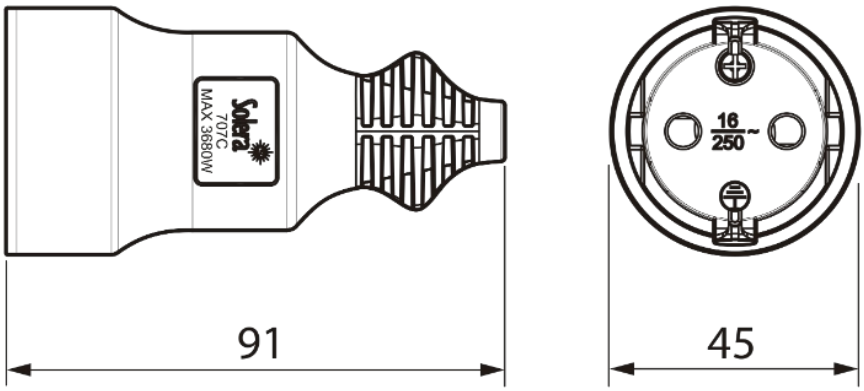

Documentation and downloads

- Assembly instructions (2.9MB)
- Commercial doc. (0.27MB)
- Safety Information (0.38MB)