

## Mobile industrial plug 2P+E, 32A 230V~. IP44.

Mobile industrial plug 2P+E, 32A 230V~. IP44.



### Features

|                             |   |
|-----------------------------|---|
| Common applications         | Industrial environments (factories, warehouses, etc.) |
| Type                        | Mobile industrial plug                                |
| No. of poles                | 2P + T  |
| Type of terminal connection | Screw connection                                      |
| Earth position              | 6h  |
| Nominal current             | 32A   |
| Nominal voltage             | 230V  |
| Color                       | Blue  |

### Technical data

|                                 |                  |
|---------------------------------|------------------|
| Protection Degree (IK)          | IK09             |
| Impact shock resistance         | Strong           |
| Fire resistance (GWEPT)         | 850 °C           |
| Heat resistance (Ball pressure) | 125 °C           |
| Ambient operating temperature   | -5 °C ; +40 °C   |
| Dimensional stability           | -25 °C -> +80 °C |
| Free of halogens                | Yes              |

### Regulations

|                                 |  |
|---------------------------------|--|
| CE marking                      | Yes  |
| UK marking                      | Yes  |
| CMim marking                    | Yes  |
| According to Regulations UNE/EN | UNE-EN 60309-1:2023<br>UNE-EN 60309-2:2023 |

|  |     |
|--|-----|
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes |
|--|-----|

|   |     |
|---|-----|
| According to European Directive 2014/35 / EU. Low voltage directive | Yes |
|---|-----|

## Sustainability

|   |     |
|---|-----|
| According to European Directive 2011/65/UE (RoHS) | Yes |
|---|-----|

|  |     |
|--|-----|
| According to European Directive 2012/19/UE (RAEE2) | Yes |
|--|-----|

|                                 |                       |
|---------------------------------|-----------------------|
| According to Regulations (RoHS) | UNE-EN IEC 63000:2022 |
|---------------------------------|-----------------------|

## Logistics and packaging

|               |               |
|---------------|---------------|
| Unit EAN code | 8423220042629 |
|---------------|---------------|

|                    |               |
|--------------------|---------------|
| EAN code container | 8423220042629 |
|--------------------|---------------|

|                    |                |
|--------------------|----------------|
| EAN code packaging | 18423220042626 |
|--------------------|----------------|

|                 |   |
|-----------------|---|
| Units packaging | 1 |
|-----------------|---|

|              |    |
|--------------|----|
| Units carton | 10 |
|--------------|----|

|              |       |
|--------------|-------|
| Pallet Units | 99999 |
|--------------|-------|

|                       |              |
|-----------------------|--------------|
| Packaging Measures cm | 28,5x19x13,5 |
|-----------------------|--------------|


|                 |       |
|-----------------|-------|
| Unit weight (g) | 182,6 |
|-----------------|-------|

|                       |        |
|-----------------------|--------|
| Container Weight (Kg) | 0,1826 |
|-----------------------|--------|

|                       |       |
|-----------------------|-------|
| Packaging Weight (Kg) | 1,959 |
|-----------------------|-------|

|             |          |
|-------------|----------|
| Tariff code | 85366990 |
|-------------|----------|

## Sketch

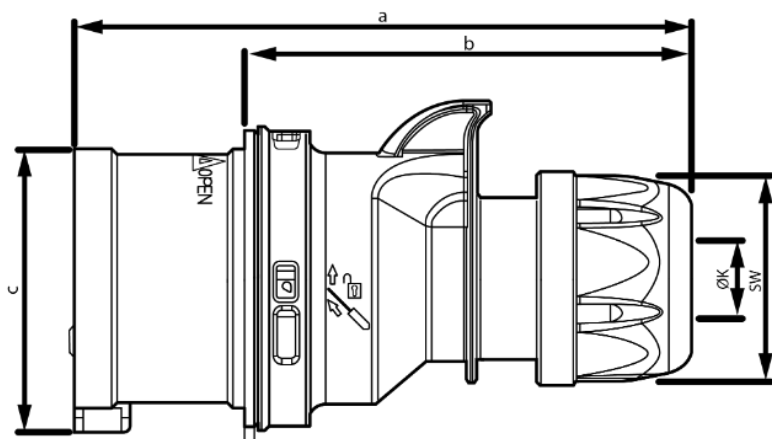

| Ampere  | 16   |      |      |      | 32      |         |         |         |
|---------|------|------|------|------|---------|---------|---------|---------|
| Pole    | 3    | 4    | 5    | 7    | 3       | 4       | 5       | 7       |
| a [mm]  | 122  | 128  | 134  | 134  | 150     | 150     | 155     | 155     |
| b [mm]  | 86   | 92   | 98   | 98   | 104     | 104     | 109     | 109     |
| c [mm]  | 47   | 53   | 61   | 61   | 63      | 63      | 70      | 70      |
| K [mm]  | 6-15 | 6-15 | 8-16 | 8-16 | 11,5-20 | 11,5-20 | 11,5-22 | 11,5-22 |
| SW [mm] | 42   | 42   | 42   | 42   | 50      | 50      | 50      | 50      |



## Documentation and downloads



Safety Information (0.38MB)