902152A

Mobile industrial plug 3P+N+E, 16A 400V~. IP44.

Industrial mobile plug with 3 poles + neutral + earth, rated at 16A 400V~. Its IP44 protection ensures safe use in industrial settings with occasional exposure to dust and water splashes. Made of durable, heat-resistant materials, it's built for intensive use. The ergonomic design allows for quick and secure connection, even in demanding conditions. Ideal for three-phase applications, temporary installations, and maintenance work in technical or industrial areas.



Features

Common applications	Industrial environments (factories, warehouses, etc.)
Type	Mobile industrial plug
No. of poles	3P + N + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	16A
Nominal voltage	400V
Color	Red

Technical data

Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 ºC
Heat resistance (Ball pressure)	125 ºC
Ambient operating temperature	-5 ºC ; +40 ºC
Dimensional stability	-25 ºC -> +80 ºC
Free of halogens	Yes

Regulations

CE marking	Yes

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2023 UNE-EN 60309-2:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220042612
EAN code container	8423220042612
EAN code packaging	18423220042619
Units packaging	1
Units carton	10
Pallet Units	1200
Packaging Measures cm	28,5x19x13,5
Unit weight (g)	152,8
Container Weight (Kg)	0,1528
Packaging Weight (Kg)	1,661
Tariff code	85366990

Sketch

902152A

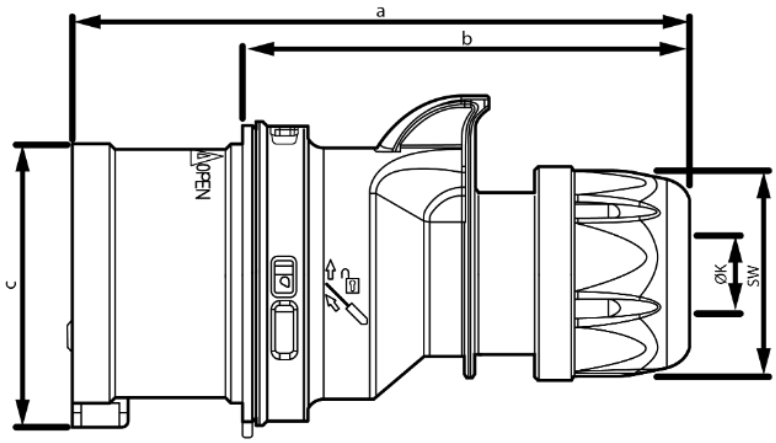

Ampere	16				32			
Pole	3	4	5	7	3	4	5	7
a [mm]	122	128	134	134	150	150	155	155
b [mm]	86	92	98	98	104	104	109	109
c [mm]	47	53	61	61	63	63	70	70
K [mm]	6-15	6-15	8-16	8-16	11,5-20	11,5-20	11,5-22	11,5-22
SW [mm]	42	42	42	42	50	50	50	50

Documentation and downloads

Safety Information (0.38MB)

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com