

## Mobile industrial plug 3P+N+E, 32A 400V~. IP44.

Industrial mobile plug with 3 poles + neutral + earth, rated at 32A 400V~. Designed for three-phase connections in industrial environments, it ensures safe and efficient performance for mobile setups, maintenance tasks, and medium-power equipment. With IP44 protection, it resists dust and water splashes. Made of impact- and heat-resistant materials, and designed ergonomically for quick and reliable handling.



### Features

Common applications	Industrial environments (factories, warehouses, etc.)
Type	Mobile industrial plug
No. of poles	3P + N + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	32A
Nominal voltage	400V
Color	Red

### Technical data

Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Ambient operating temperature	-5 °C ; +40 °C
Dimensional stability	-25 °C -> +80 °C
Free of halogens	Yes

### Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2023 UNE-EN 60309-2:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

## Logistics and packaging

Unit EAN code	8423220042643
EAN code container	8423220042643
EAN code packaging	18423220042640
Units packaging	1
Units carton	10
Pallet Units	1280
Packaging Measures cm	28,8x19x17
Unit weight (g)	233,2
Container Weight (Kg)	0,2332
Packaging Weight (Kg)	2,479
Tariff code	85366990

## Sketch

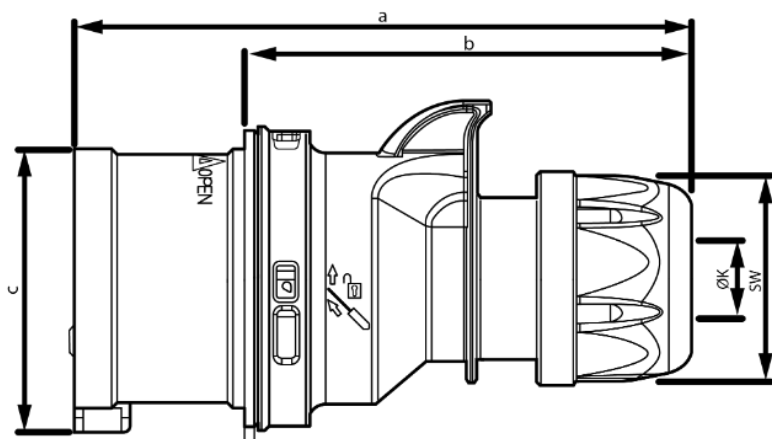

Ampere	16				32			
Pole	3	4	5	7	3	4	5	7
a [mm]	122	128	134	134	150	150	155	155
b [mm]	86	92	98	98	104	104	109	109
c [mm]	47	53	61	61	63	63	70	70
K [mm]	6-15	6-15	8-16	8-16	11,5-20	11,5-20	11,5-22	11,5-22
SW [mm]	42	42	42	42	50	50	50	50



## Documentation and downloads



Safety Information (0.38MB)