902437A

Mobile industrial plug 2P+E, 125A 230V~. IP67



Mobile industrial plug 2P+E, 125A 230V~. IP67

Features

Common applications	Industrial environments (factories, warehouses, etc.)
With contact pilot	Yes
Type	Mobile industrial plug
No. of poles	2P + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	125A
Nominal voltage	230V
Color	Blue

Technical data

Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Ambient operating temperature	-5 °C ; +40 °C
Dimensional stability	-25 °C -> +80 °C
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2023 UNE-EN 60309-2:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

Logistics and packaging

Unit EAN code	8423220042681
EAN code container	8423220042681
EAN code packaging	18423220042688
Units packaging	1
Units carton	2
Pallet Units	99999
Packaging Measures cm	33x26x17
Unit weight (g)	971
Container Weight (Kg)	0,971
Packaging Weight (Kg)	2,152
Tariff code	85366990

Sketch

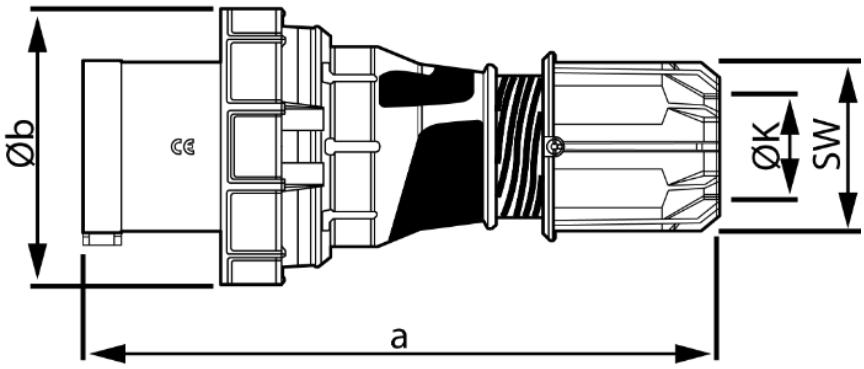



Ampere	125		
Pole	3	4	5
a [mm]	270	270	270
b [mm]	131	131	131
K [mm]	22,5-50	22,5-50	22,5-50
SW [mm]	81	81	81

Documentation and downloads

Safety Information (0.38MB)