902448A

Mobile industrial plug 3P+E, 125A 400V~. IP67.



Mobile industrial plug 3P+E, 125A 400V~. IP67.

Features

Common applications	Industrial environments (factories, warehouses, etc.)
Type	Mobile industrial plug
No. of poles	3P + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	125A
Nominal voltage	400V
Color	Red

Technical data

Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Ambient operating temperature	-5 °C ; +40 °C
Dimensional stability	-25 °C -> +80 °C
Free of halogens	Yes

Regulations

CE marking	Yes

CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2023 UNE-EN 60309-2:2023
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022


Logistics and packaging

Unit EAN code	8423220042698
EAN code container	8423220042698
EAN code packaging	18423220042695
Units packaging	1
Units carton	2
Pallet Units	99999
Packaging Measures cm	33x26x17
Unit weight (g)	1077,8
Container Weight (Kg)	1,0778
Packaging Weight (Kg)	2,3656
Tariff code	85366990

Sketch

902448A

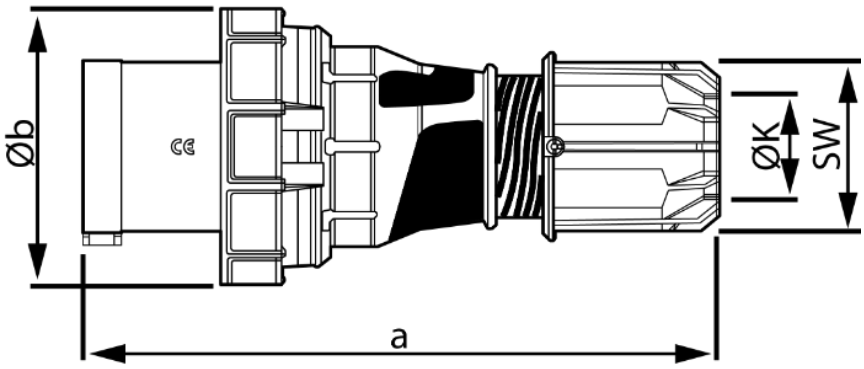



Ampere	125		
Pole	3	4	5
a [mm]	270	270	270
b [mm]	131	131	131
K [mm]	22,5-50	22,5-50	22,5-50
SW [mm]	81	81	81

Documentation and downloads

Safety Information (0.38MB)

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com