

Lampholder E-14. Screw connection. 2A 250V. Threaded body with stopper.

E14 screw lamp holder with black threaded thermoplastic body. Rated for 2A at 250V~, with screw terminal connection. Includes M10-100 threaded entry with safety stop and locking screw in the cap to prevent rotation. Perfect for lighting in residential, commercial or decorative setups.



Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Material	Thermoplastic
Tension	250 V~
Electricity	2 A
Fixation System	M10/100
Threaded body	Yes
Maximum power	80W
Color	Black
Threaded stud length in glands	sí

Technical data

Free of halogens	Yes
------------------	-----

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60238:2018

In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
--	-----

According to European Directive 2014/35 / EU. Low voltage directive	Yes
---	-----

Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes
---	-----

According to European Directive 2012/19/UE (RAEE2)	Yes
--	-----

According to Regulations (RoHS)	UNE-EN IEC 63000:2022
---------------------------------	-----------------------

Logistics and packaging

Unit EAN code	8423220237094
---------------	---------------

EAN code container	8423220000445
--------------------	---------------

EAN code packaging	18423220000442
--------------------	----------------

Units packaging	45
-----------------	----

Units carton	360
--------------	-----

Pallet Units	17280
--------------	-------

Packaging Measurements cm	14,5x8,8x19
---------------------------	-------------

Packaging Measures cm	37,5x30x20
-----------------------	------------


Unit weight (g)	21
-----------------	----

Container Weight (Kg)	1,0091
-----------------------	--------

Packaging Weight (Kg)	8,4048
-----------------------	--------

Tariff code	85366110
-------------	----------


Sketch

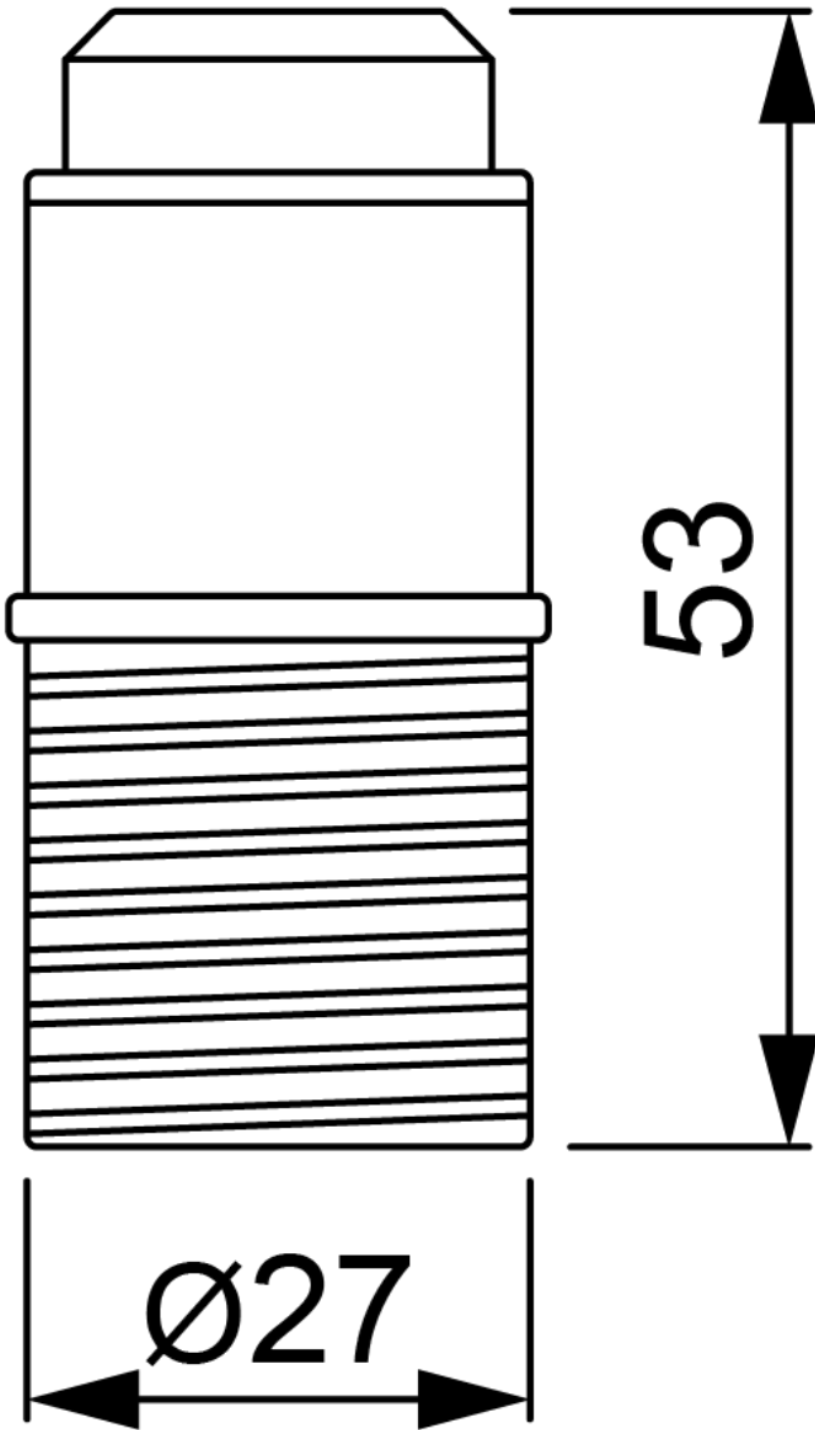

Sketch

PORTALÁMPARAS

E14

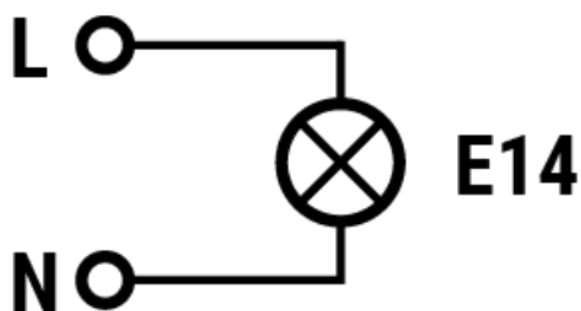

Documentation and downloads



Safety Information (0.38MB)