

## Flush distribution board, 14 modules. With lock

Flush distribution board, 14 modules. White frame and door. Flush dimensions 320 x 233 x 75 mm. Sealable. With lock



### Features

|  |                             |
|--|-----------------------------|
| Installation method                          | Flush in work               |
| Use  | Domestic / Tertiary         |
| Location type                                | Inside                      |
| No. Modules (18 mm)                          | 14                          |
| Modules per row                              | 14                          |
| Metallic DIN profile                         | Yes                         |
| Dimensions gap (mm) (Width x Height x Depth) | 320x233x75                  |
| Dimensions (mm)                              | See sketch                  |
| Case material                                | Insulation                  |
| Frame and door material                      | Insulation                  |
| Case color                                   | Black                       |
| Cap color                                    | White                       |
| Door color                                   | White                       |
| Door opening                                 | Horizontal                  |
| Battens included                             | No                          |
| Ticket type                                  | Unfathomable                |
| Fixation System (For surface)                | Inside                      |
| Sealable                                     | Yes                         |
| Linkable                                     | Vertically and horizontally |
| Lid closure system                           | Metal screw                 |
| Door closing system                          | With lock                   |

|                                       |   |
|---------------------------------------|---|
| Reversible door                       | Yes   |
| Possibility of mounting strips        | Yes (not included)  |
| Possibility of putting lock           | Key included  |
| Separate covers or doors on the boxes | Yes   |
| Possibility of mounting DIN rail      | Yes (included)  |
| Common applications                   | Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.) |
| Additional dimensions (mm)            | See sketch  |

## Technical data

|                                 |                  |
|---------------------------------|------------------|
| Protection Degree (IK)          | IK08             |
| Insulation class                | Class II         |
| Fire resistance (GWEPT)         | 650 °C           |
| Heat resistance (Ball pressure) | 70 °C            |
| Installation temperature        | -5 °C -> +60 °C  |
| Ambient operating temperature   | -5 °C ; +60 °C   |
| Work stress                     | 400 Vac-1000 Vdc |
| Thermal power dissipated        | 24 W             |
| Free of halogens                | Yes              |

## Regulations

|  |                   |
|--|-------------------|
| CE marking   | Yes               |
| UK marking   | Yes               |
| CMim marking   | Yes               |
| According to Regulations UNE/EN  | UNE-EN 62208:2012 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes               |
| According to European Directive 2014/35 / EU. Low voltage directive    | Yes               |

## Sustainability

|   |  |
|---|--|
| According to European Directive 2011/65/UE (RoHS) | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1 |
|---|--|


According to European Directive 2012/19/UE (RAEE2)

Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

## Logistics and packaging

|                           |                |
|---------------------------|----------------|
| Unit EAN code             | 8423220055803  |
| EAN code container        | 8423220055803  |
| EAN code packaging        | 18423220055800 |
| Units packaging           | 1              |
| Units carton              | 11             |
| Pallet Units              | 165            |
| Packaging Measurements cm | 36,5x25x10,5   |
| Packaging Measures cm     | 59,8x37,5x59   |
| Container Weight (Kg)     | 0,161          |
| Packaging Weight (Kg)     | 2,871          |
| Tariff code               | 85371098       |

## Sketch

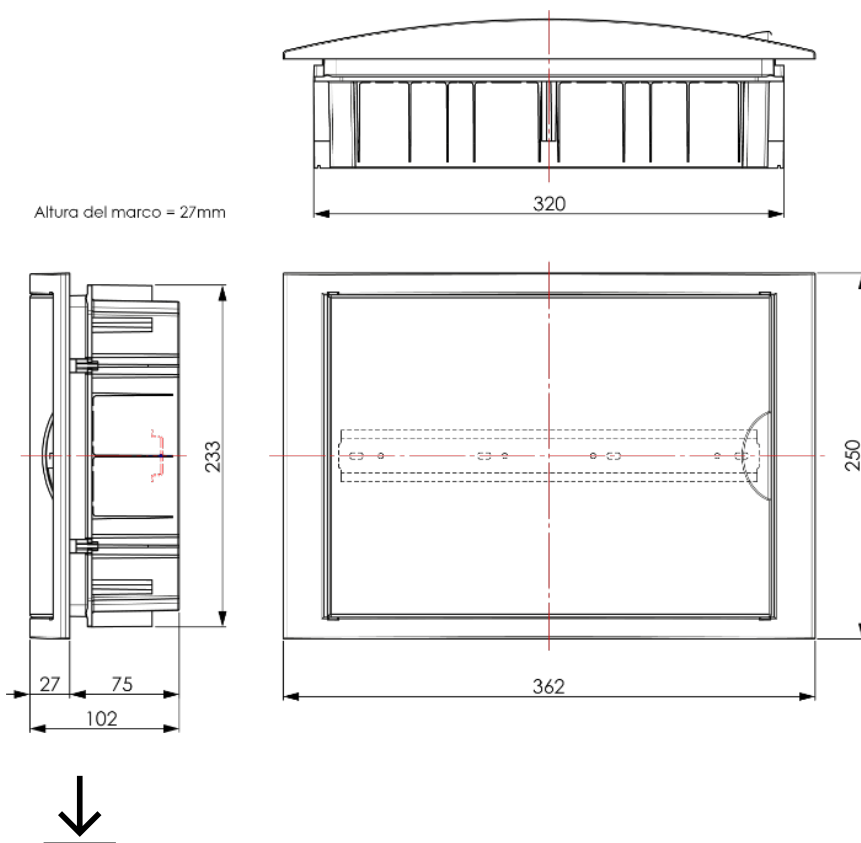

## Documentation and downloads



Included accessories (0.14MB)



Dimensions table (0.15MB)



Distribution boards Arelos range (Solera) (Ed. 2024)



Safety Information (0.38MB)



Series replenishments (0.12MB)



Mounting distribution boards. Arelos range (Solera)