

Flush distribution board, 12 modules. Smoked door.

Flush-mounted board with 12 modules. White frame and smoked door. Flush dimensions 277 x 220 x 72 mm. Compact, discreet design for modular flush installations.



Features

| | |
|--|-----------------------------|
| Installation method | Flush in work |
| Use | Domestic / Tertiary |
| Location type | Inside |
| No. Modules (18 mm) | 12 |
| Modules per row | 12 |
| Metallic DIN profile | Yes |
| Dimensions gap (mm) (Width x Height x Depth) | 277x220x72 |
| Dimensions (mm) | See sketch |
| Case material | Insulation |
| Frame and door material | Insulation |
| Case color | Black |
| Cap color | White |
| Door color | Fume |
| Door opening | Vertical |
| Battens included | No |
| Ticket type | Unfathomable |
| Fixation System (For surface) | Inside |
| Sealable | Not |
| Linkable | Vertically and horizontally |
| Lid closure system | Metal screw |

| | |
|---------------------------------------|---|
| Door closing system | A Pressure |
| Reversible door | Yes |
| Possibility of mounting strips | Yes (not included) |
| Possibility of putting lock | Yes (not included) |
| Separate covers or doors on the boxes | Yes |
| Possibility of mounting DIN rail | Yes (included) |
| Common applications | Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.) |
| Additional dimensions (mm) | See sketch |

Technical data

| | |
|---------------------------------|------------------|
| Protection Degree (IK) | IK08 |
| Insulation class | Class II |
| Fire resistance (GWEPT) | 650 °C |
| Heat resistance (Ball pressure) | 70 °C |
| Installation temperature | -5 °C -> +60 °C |
| Ambient operating temperature | -5 °C ; +60 °C |
| Work stress | 400 Vac-1000 Vdc |
| Free of halogens | Yes |

Regulations

| | |
|--|-------------------|
| CE marking | Yes |
| UK marking | Yes |
| CMim marking | Yes |
| According to Regulations UNE/EN | UNE-EN 62208:2012 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes |
| According to European Directive 2014/35 / EU. Low voltage directive | Yes |

Sustainability

| | |
|---|--|
| According to European Directive 2011/65/UE (RoHS) | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1 |
|---|--|


According to European Directive 2012/19/UE (RAEE2)

Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).


Logistics and packaging

| | |
|---------------------------|----------------|
| Unit EAN code | 8423220012127 |
| EAN code container | 8423220012127 |
| EAN code packaging | 18423220012124 |
| Units packaging | 1 |
| Units carton | 10 |
| Pallet Units | 150 |
| Packaging Measurements cm | 11x25x35,1 |
| Packaging Measures cm | 57,8x38,5x46 |
| Unit weight (g) | 755 |
| Container Weight (Kg) | 0,8806 |
| Packaging Weight (Kg) | 9,593 |
| Tariff code | 85371098 |

Sketch

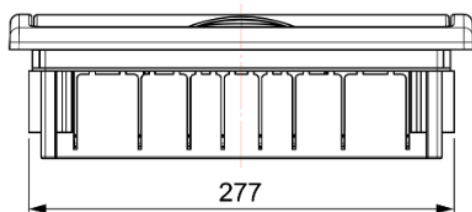

Altura del marco = 23mm

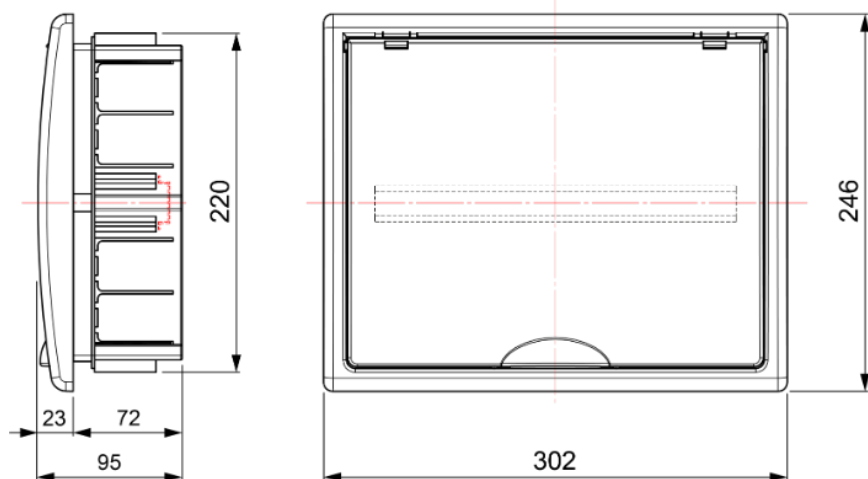

Documentation and downloads



Included accessories (0.14MB)



Safety Information (0.38MB)



Dimensions table (0.15MB)



Series replenishments (0.04MB)



Distribution boards Arelos range (Solera) 2020