# 5021PF

## Surface distribution board, 14 modules. Smoked door.



Surface-mounted board for 14 modules. White box and frame with smoked door. Designed for exposed installations requiring a clean, professional appearance with easy access. Dimensions: 362 x 250 x 104 mm.

## Features

| | |
|---|---|
| Installation method | Surface |
| Use | Domestic / Tertiary |
| Location type | Inside |
| No. Modules (18 mm) | 14 |
| Modules per row | 14 |
| Metallic DIN profile | Yes |
| Dimensions outside (mm) (width x height x depth) | 362x250x104 |
| Dimensions (mm) | See sketch |
| Case material | Thermoplastic |
| Frame and door material | Insulation |
| Case color | White |
| Cap color | White |
| Door color | Fume |
| Door opening | Horizontal |
| Battens included | No |
| Ticket type | Pre-punched |
| Fixation System (For surface) | Inside |
| Sealable | Yes |
| Lid closure system | Metal screw |
| Door closing system | A Pressure |

| | |
|---|---|
| Reversible door | Yes |
| Possibility of mounting strips | Yes (not included) |
| Possibility of putting lock | Yes (not included) |
| Separate covers or doors on the boxes | Yes |
| Possibility of mounting DIN rail | Yes (included) |
| Common applications | Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.) |
| Additional dimensions (mm) | See sketch |

## Technical data

| | |
|---|---|
| Protection Degree (IK) | IK08 |
| Insulation class | Class II |
| Fire resistance (GWEPT) | 650 ºC |
| Heat resistance (Ball pressure) | 70 ºC |
| Installation temperature | -5 ºC -> +60 ºC |
| Ambient operating temperature | -5 ºC ; +60 ºC |
| Work stress | <1000 Vac ; 1500 Vdc |
| Thermal power dissipated | 40 W |
| Free of halogens | Yes |

## Regulations

| | |
|---|---|
| CE marking | Yes |
| CMim marking | Yes |
| According to Regulations UNE/EN | UNE-EN 62208:2012 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes |
| According to European Directive 2014/35 / EU. Low voltage directive | Yes |

## Sustainability


| | |
|---|---|
| According to European Directive 2011/65/UE (RoHS) | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1 |

| | |
|---|---|
| According to European Directive 2012/19/UE (RAEE2) | Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II). |

## Logistics and packaging

| | |
|---|---|
| Unit EAN code | 8423220030244 |
| EAN code container | 8423220030244 |
| EAN code packaging | 18423220030241 |
| Units packaging | 1 |
| Units carton | 11 |
| Pallet Units | 165 |
| Packaging Measurements cm | 36,5x25x10,5 |
| Packaging Measures cm | 59,8x37,5x59 |
| Unit weight (g) | 1268 |
| Container Weight (Kg) | 1,429 |
| Packaging Weight (Kg) | 16,819 |
| Tariff code | 85371098 |

## Sketch

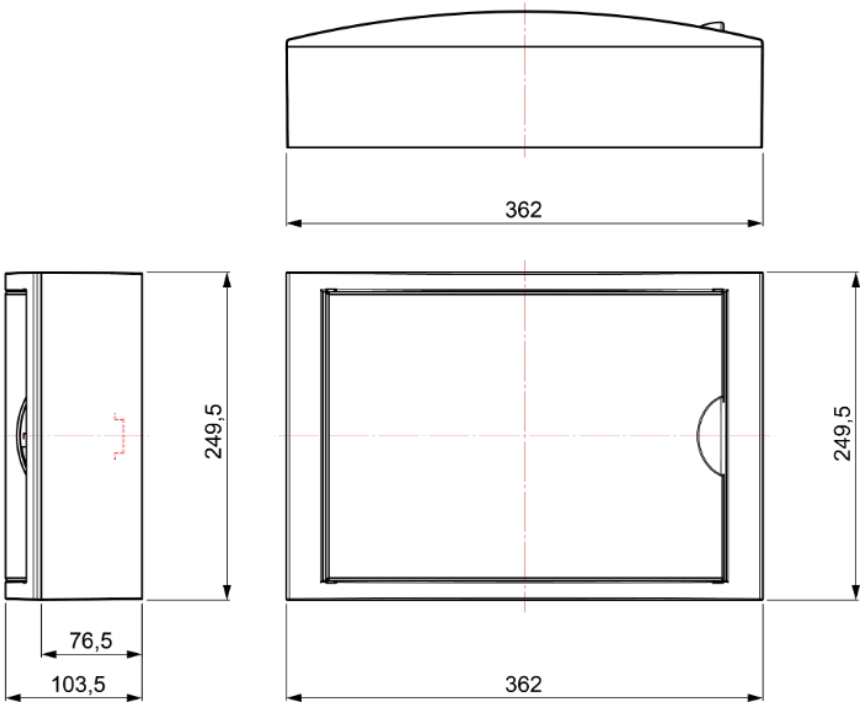

## Documentation and downloads

- Assembly instructions (2.09MB)
- Safety Information (0.38MB)
- Table of compatibilities: box, frame and door (0.06MB)
- Distribution boards Arelos range (Solera) (Ed. 2024)
- Included accessories (0.09MB)
- Certificate (0.48MB)
- Dimensions table (0.15MB)
- Series replenishments (0.04MB)
- Mounting distribution boards. Arelos range (Solera)