

Surface distribution board, 56 modules.

Surface-mounted board for 56 modules arranged in 4 rows. White finish.
Suitable for larger visible installations requiring organised module distribution.
External dimensions: 362 x 686 x 104 mm. I nom = 63A.



Features

| | |
|--|---------------------|
| Installation method | Surface |
| Use | Domestic / Tertiary |
| Location type | Inside |
| No. Modules (18 mm) | 56 |
| Modules per row | 14 |
| Metallic DIN profile | Yes |
| Dimensions outside (mm) (width x height x depth) | 362x686x104 |
| Dimensions (mm) | See sketch |
| Case material | Insulation |
| Frame and door material | Insulation |
| Case color | White |
| Cap color | White |
| Door color | White |
| Door opening | Horizontal |
| Battens included | No |
| Ticket type | Pre-punched |
| Fixation System (For surface) | Inside |
| Sealable | Not |
| Lid closure system | Metal screw |

| | |
|---------------------------------------|---|
| Door closing system | A Pressure |
| Reversible door | Yes |
| Possibility of mounting strips | Yes (not included) |
| Possibility of putting lock | Yes (not included) |
| Separate covers or doors on the boxes | Yes |
| Possibility of mounting DIN rail | Yes (included) |
| Common applications | Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.) |
| Additional dimensions (mm) | See sketch |

Technical data

| | |
|---------------------------------|----------------------|
| Protection Degree (IK) | IK08 |
| Insulation class | Class II |
| Fire resistance (GWEPT) | 650 °C |
| Heat resistance (Ball pressure) | 70 °C |
| Installation temperature | -5 °C -> +60 °C |
| Ambient operating temperature | -5 °C ; +60 °C |
| Work stress | <1000 Vac ; 1500 Vdc |
| Thermal power dissipated | 109 W |
| Free of halogens | Yes |

Regulations

| | |
|--|-------------------|
| CE marking | Yes |
| UK marking | Yes |
| CMim marking | Yes |
| According to Regulations UNE/EN | UNE-EN 62208:2012 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes |
| According to European Directive 2014/35 / EU. Low voltage directive | Yes |


Sustainability

| | |
|--|---|
| According to European Directive 2011/65/UE (RoHS) | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1 |
| According to European Directive 2012/19/UE (RAEE2) | Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II). |





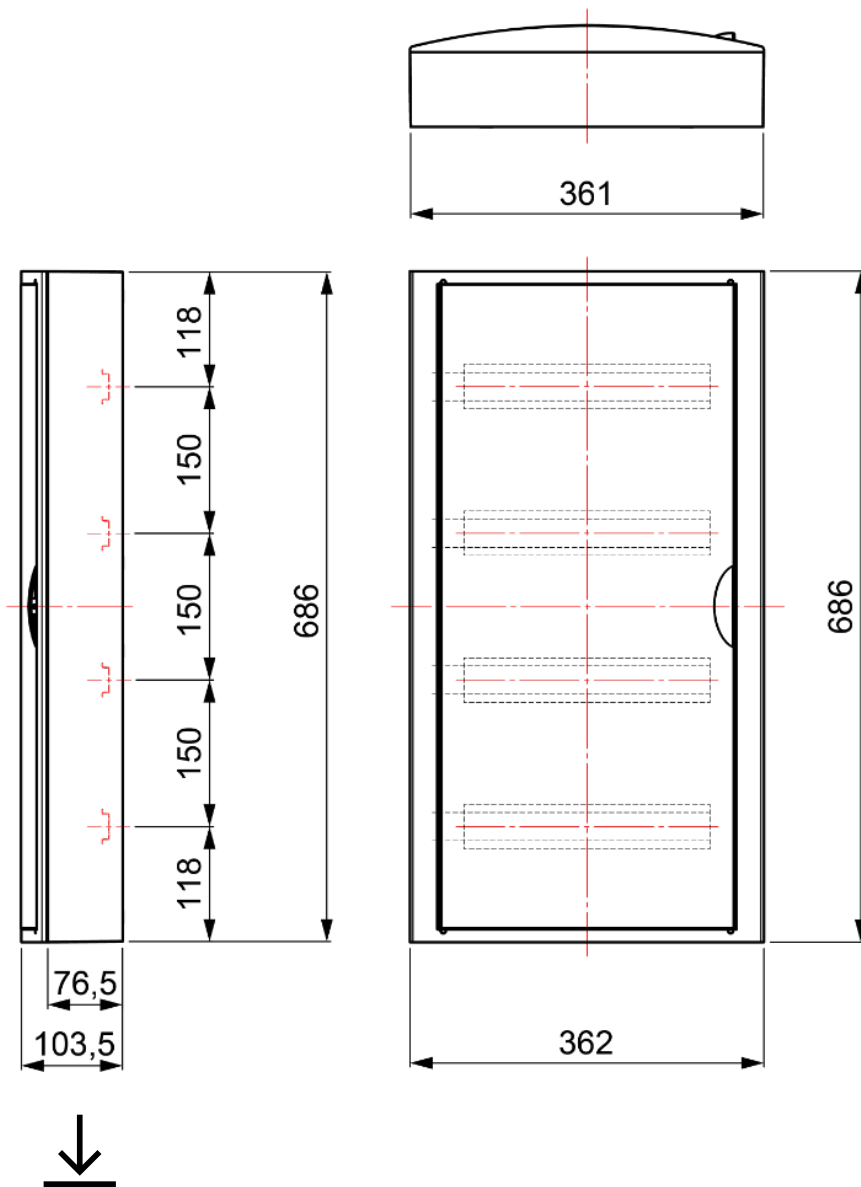

Logistics and packaging

| | |
|-----------------------|----------------|
| Unit EAN code | 8423220017627 |
| EAN code container | 8423220017627 |
| EAN code packaging | 18423220017624 |
| Units packaging | 1 |
| Units carton | 1 |
| Pallet Units | 36 |
| Packaging Measures cm | 10,7x36,3x68,8 |
| Packaging Weight (Kg) | 3,325 |
| Tariff code | 85371098 |

Sketch



Documentation and downloads

- | | | | |
|--|---|---|--|
|  | Assembly instructions (2.09MB) |  | Included accessories (0.09MB) |
|  | Safety Information (0.38MB) |  | Dimensions table (0.15MB) |
|  | Series replenishments (0.04MB) |  | Distribution boards Arelos range (Solera) (Ed. 2024) |
|  | Mounting distribution boards. Arelos range (Solera) | | |