

Flush connection box. 250 x 250 x 60 mm. Cover with metal claw.

Flush connection box. 250 x 250 x 60 mm. Cover with metal claw. Depth 60 mm.
20 inputs for tube Ø 40 mm.



Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	250x250x60
Case material	Insulation
Case color	Black
Cap color	White
No. of inlets and size (mm)	20 xØ 40
Lid closure system	Metal claw
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes




Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronic Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220006249
EAN code container	8423220006249
EAN code packaging	18423220006246
Units packaging	1
Units carton	28
Pallet Units	420
Packaging Measures cm	59,5x39,5x59,5
Unit weight (g)	453
Container Weight (Kg)	0,456
Packaging Weight (Kg)	13,898
Tariff code	85371098

Sketch

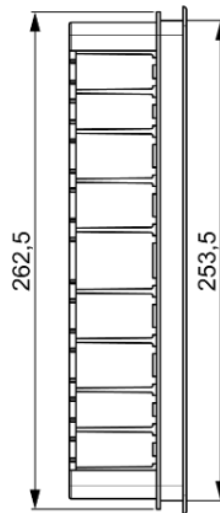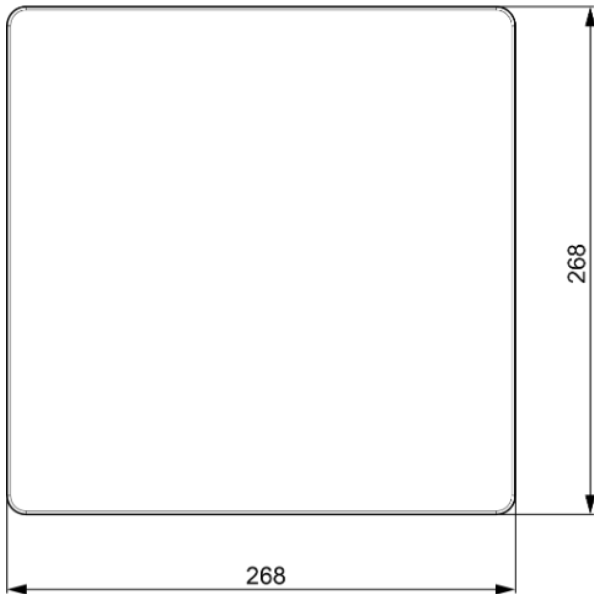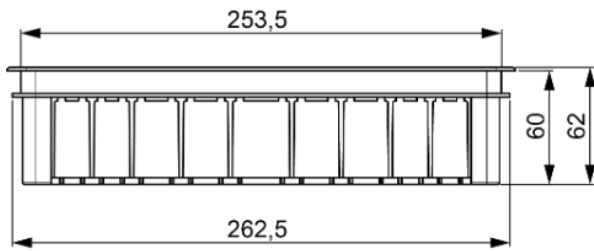

Documentation and downloads



Assembly instructions (0.17MB)



Safety Information (0.38MB)



Series replenishments (0.26MB)