

Flush connection box. 300x500x60mm. White frame and door.

Flush connection box. 300 x 500 mm. White frame and door. Depth 60 mm. 50 inputs for tube Ø 40 mm. Two partition walls.



Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	300x500x60
Case material	Insulation
Case color	Black
Cap color	White
Door color	White
No. of inlets and size (mm)	50 xØ 40
Lid closure system	Metal screw
Door closing system	A Pressure
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C

Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/EU (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/EU (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220009158
EAN code container	8423220009158
EAN code packaging	18423220009155
Units packaging	1
Units carton	5
Pallet Units	75
Packaging Measures cm	57,8x38,5x46
Unit weight (g)	1618
Container Weight (Kg)	1,618
Packaging Weight (Kg)	8,877
Tariff code	85371098

Sketch

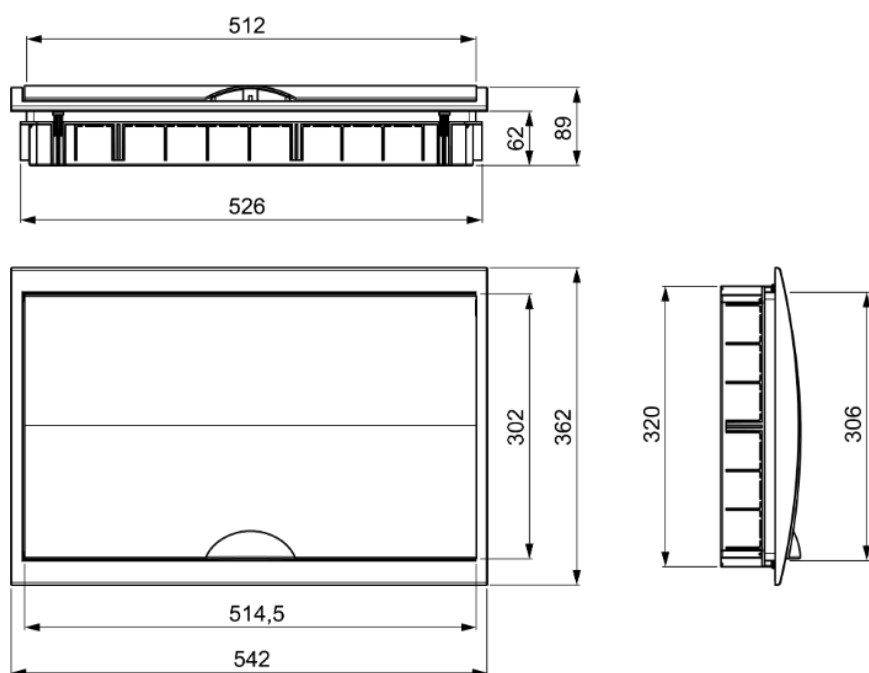

Documentation and downloads



Assembly instructions (0.17MB)



Safety Information (0.38MB)



Series replenishments (0.26MB)