

## Surface connection box. 132 x 65 mm. White colour.

Surface connection box. 132 x 65 mm. White colour. Height 35 mm. Inputs for mini-trunking up to 10 x 22 mm.



### Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions outside (mm) (width x height x depth)	132x65x35
Case material	Insulation
Case color	White
Fixation System (For surface)	Exterior
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

### Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Work stress	400 Vac
Free of halogens	Yes

### Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007

In accordance with the Low Voltage  
Electrotechnical Regulations (REBT) Yes

According to European Directive 2014/35 /  
EU. Low voltage directive Yes

## Sustainability


According to European Directive  
2011/65/UE (RoHS) The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1

According to European Directive  
2012/19/UE (RAEE2) Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

## Logistics and packaging

Unit EAN code	8423220240100
EAN code container	8423220004108
EAN code packaging	18423220004105
Units packaging	11
Units carton	88
Pallet Units	3080
Packaging Measurements cm	17,8x14,3x19
Packaging Measures cm	59,5x37,5x20
Unit weight (g)	77,6
Container Weight (Kg)	0,9416
Packaging Weight (Kg)	8,1128
Tariff code	85371098

## Sketch

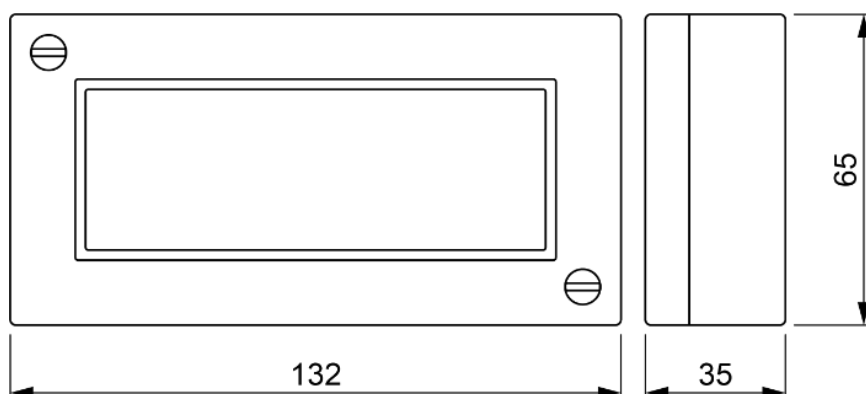



## Documentation and downloads



Assembly instructions (0.59MB)



Safety Information (0.38MB)