

Surface connection box. 82 x 82 mm. White colour.

Surface connection box. 82 x 82 mm. White colour. Height 40 mm. 10 x 22, 10 x 16, 10 x 22 and 10 x 36 mm mini-trunking inputs.



Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions outside (mm) (width x height x depth)	82x82x40
Case material	Insulation
Case color	White
Fixation System (For surface)	Exterior
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes

CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220240117
EAN code container	8423220002005
EAN code packaging	18423220002002
Units packaging	12
Units carton	96
Pallet Units	3360
Packaging Measurements cm	17,8x14,3x19
Packaging Measures cm	59,5x37,5x20
Unit weight (g)	55,8
Container Weight (Kg)	0,7576
Packaging Weight (Kg)	6,6408
Tariff code	85371098

Sketch

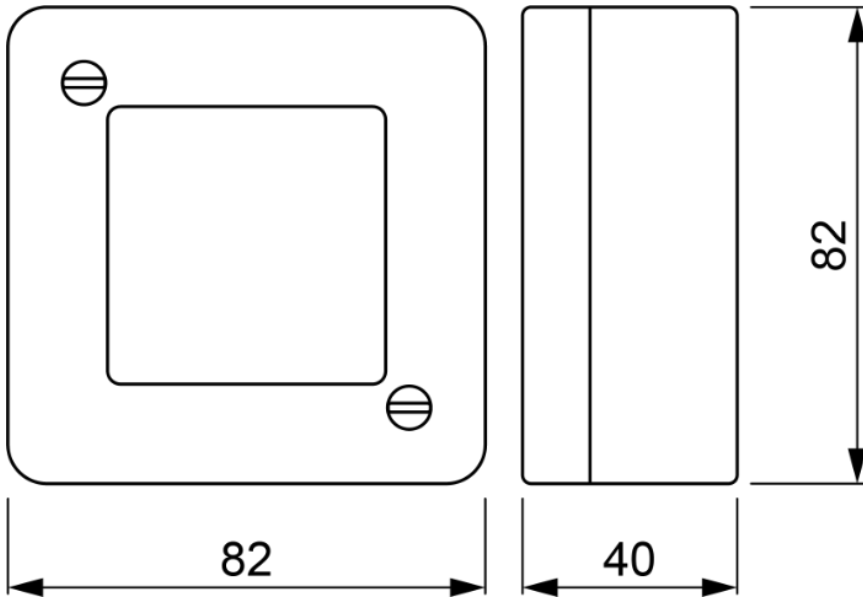

Documentation and downloads



Assembly instructions (0.59MB)



Safety Information (0.38MB)