515S

Surface connection box. Ø 113 mm. With round and threaded cover in the center of the box.



Surface connection box. Ø 113 mm. With round and threaded cover in the center of the box.Height 41 mm. With 4 inputs for tube Ø 20 and 4 inputs for tube Ø 18 mm at the bottom.

Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions outside (mm) (width x height x depth)	Ø 113x41
Case material	Thermoplastic
Case color	Grey (RAL7035)
Door color	Grey (RAL7035)
No. of inlets and size (mm)	4x Ø 20 y 4xØ 18
Fixation System (For surface)	Inside
Lid closure system	Threaded
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Insulation class	Class II
Fire resistance (GWEPT)	650 ºC
Ambient operating temperature	-5 ºC ; +60 ºC
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).


Logistics and packaging

Unit EAN code	8423220340213
EAN code container	8423220340213
EAN code packaging	18423220340210
Units packaging	1
Units carton	230
Pallet Units	2760
Packaging Measures cm	59,5x42,5x51
Unit weight (g)	55
Container Weight (Kg)	0,057
Packaging Weight (Kg)	14,034
Tariff code	85371098

Sketch

515S

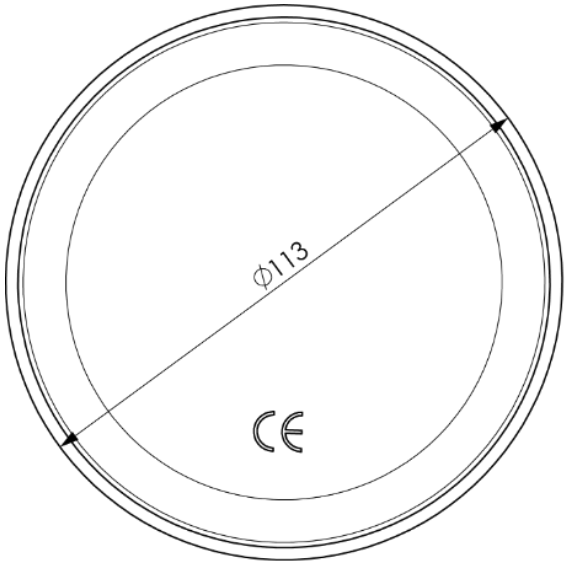

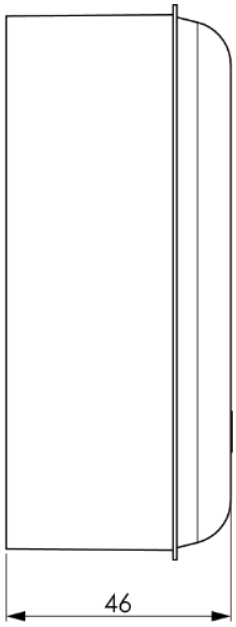

Documentation and downloads

Assembly instructions (0.59MB)

Safety Information (0.38MB)