

Surface connection box.. With frame and door. White colour.

Surface connection box. 360 x 540 x 115 mm. With frame and door. White colour.



Features

Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions outside (mm) (width x height x depth)	360x540x115
Case material	Insulation
Case color	White
Door color	White
Door opening	Horizontal
Fixation System (For surface)	Inside
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Protection Degree (IK)	IK07
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronic Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220009745
EAN code container	8423220009745
EAN code packaging	18423220009742
Units packaging	1
Units carton	1
Pallet Units	60
Packaging Measures cm	54,6x36,4x11,8
Packaging Weight (Kg)	2,4056
Tariff code	85371098

Sketch

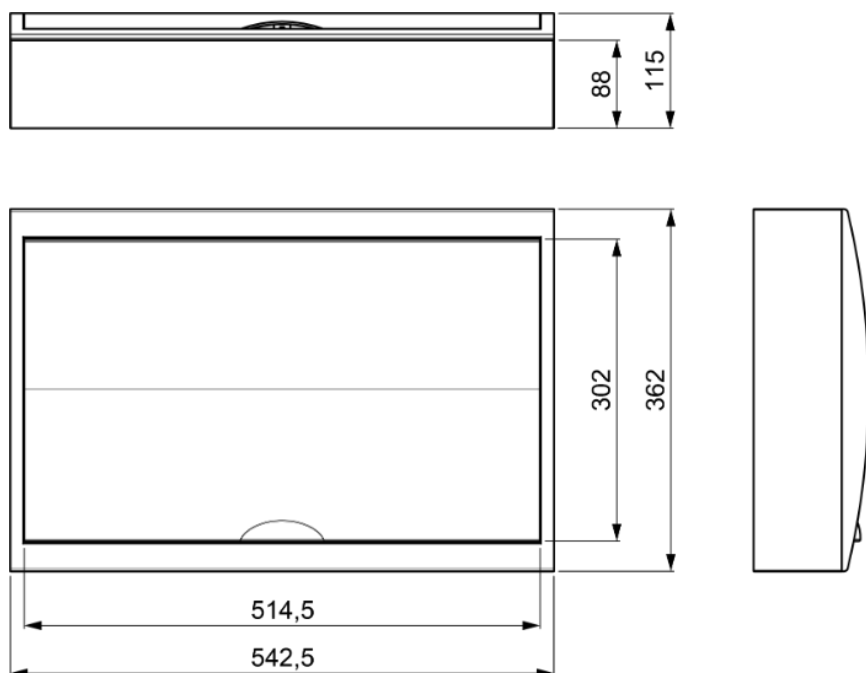

Documentation and downloads



Assembly instructions (0.59MB)



Safety Information (0.38MB)