

## Flush distribution board in hollow wall of 42 modules.

Flush distribution board in hollow wall of 42 modules. 3 rows. Blue multi-perforated fixing system. White frame and door. Flush dimensions 360 x 528 x 86 mm.



### Features

|  |                             |
|--|-----------------------------|
| Installation method                          | For hollow wall.            |
| Use  | Domestic / Tertiary         |
| Location type                                | Inside                      |
| No. Modules (18 mm)                          | 42                          |
| Modules per row                              | 14                          |
| Removable frame                              | Yes                         |
| Metallic DIN profile                         | Yes                         |
| Dimensions gap (mm) (Width x Height x Depth) | 360x528x86                  |
| Dimensions (mm)                              | See sketch                  |
| Case material                                | Insulation                  |
| Frame and door material                      | Insulation                  |
| Case color                                   | Blue                        |
| Door color                                   | White                       |
| Door opening                                 | Horizontal                  |
| Battens included                             | No                          |
| Ticket type                                  | Unfathomable                |
| Linkable                                     | Vertically and horizontally |
| Lid closure system                           | Metal screw                 |
| Door closing system                          | Handle                      |

|  |   |
|--|---|
| Reversible door                        | Yes   |
| Possibility of mounting strips         | Yes (not included)  |
| Possibility of putting lock            | Yes (not included)  |
| Possibility of mounting DIN rail       | Yes (included)  |
| Fixing system to the hollow partition. | Multi-perforated support for hollow wall blue colour                            |
| Common applications                    | Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.) |
| Additional dimensions (mm)             | See sketch  |

## Technical data

|                                 |                      |
|---------------------------------|----------------------|
| Protection Degree (IK)          | IK08                 |
| Impact shock resistance         | Medium               |
| Insulation class                | Class II             |
| Fire resistance (GWEPT)         | 850 °C               |
| Heat resistance (Ball pressure) | 70 °C                |
| Ambient operating temperature   | -5 °C ; +60 °C       |
| Work stress                     | <1000 Vac ; 1500 Vdc |
| Thermal power dissipated        | 69 W                 |
| Free of halogens                | Yes                  |

## Regulations

|  |                   |
|--|-------------------|
| CE marking   | Yes               |
| UK marking   | Yes               |
| CMim marking   | Yes               |
| According to Regulations UNE/EN  | UNE-EN 62208:2012 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes               |
| According to European Directive 2014/35 / EU. Low voltage directive    | Yes               |

## Sustainability

|   |  |
|---|--|
| According to European Directive 2011/65/UE (RoHS) | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1 |
|---|--|


According to European Directive  
2012/19/UE (RAEE2)

Not applicable because it does not meet the definition of Electrical and Electronic  
Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

## Logistics and packaging

|                       |                |
|-----------------------|----------------|
| Unit EAN code         | 8423220092822  |
| EAN code container    | 8423220092822  |
| EAN code packaging    | 18423220092829 |
| Units packaging       | 1              |
| Units carton          | 4              |
| Pallet Units          | 60             |
| Packaging Measures cm | 59,5x39,5x48   |
| Unit weight (g)       | 2330           |
| Container Weight (Kg) | 2,355          |
| Packaging Weight (Kg) | 10,47          |
| Tariff code           | 39259010       |

## Sketch

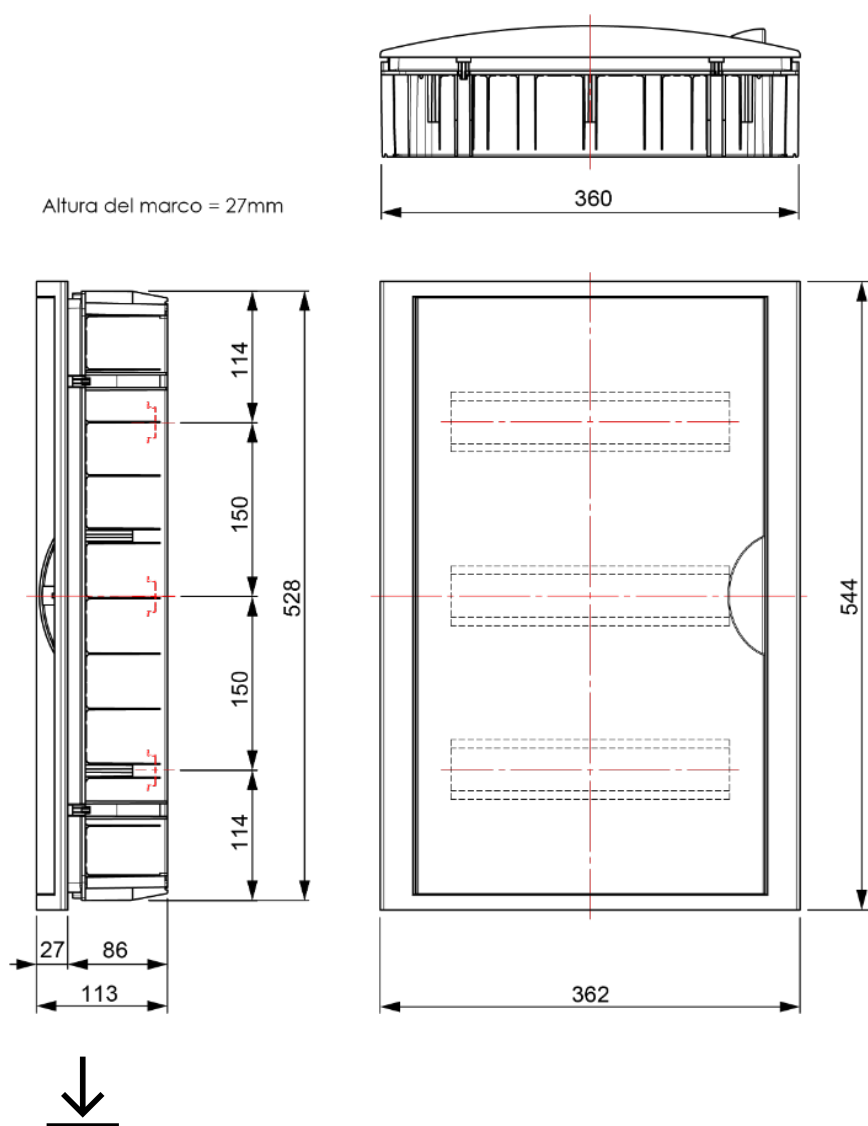

## Documentation and downloads



Commercial doc. (3.42MB)



Commercial doc. (0.34MB)



Safety Information (0.38MB)