5270ICTHGW

Flush distribution board for hollow walls, 56 modules + ICT.

Flush distribution board for hollow walls with 56 modules + ICT. White frame and door for the distribution board. ICT section with frame and door featuring heat-dissipation grilles. Flush dimensions for distribution board: 320 x 670 x 75 mm. Flush dimensions for ICT section: 688 x 526 x 86 mm. Linkable horizontally and vertically. Ø 50 mm tubes for connection between boxes. With internal partition.



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
No. Modules (18 mm)	56
Modules per row	14
Removable frame	Yes
Metallic DIN profile	Yes
Dimensions (mm)	See sketch
Case material	Thermoplastic
Frame and door material	Insulation
Case color	Blue
Cap color	White
Door color	White with heat dissipation grid.
Door opening	Horizontal
Battens included	No
Ticket type	Unfathomable
Fixation System (For surface)	Inside
Sealable	Not
Linkable	Vertically and horizontally
Lid closure system	Metal screw

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

Door closing system	A Pressure
Reversible door	Yes
Possibility of mounting strips	Yes (not included)
Possibility of putting lock	Yes (not included)
Separate covers or doors on the boxes	Yes
Possibility of mounting DIN rail	Yes (included)
Fixing system to the hollow partition.	Multi-perforated support for hollow wall black colour.
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Additional dimensions (mm)	See sketch

Technical data

Protection Degree (IK)	IK08
Insulation class	Class II
Fire resistance (GWEPT)	650 ºC
Heat resistance (Ball pressure)	70 ºC
Installation temperature	-5 ºC -> +60 ºC
Ambient operating temperature	-5 ºC ; +60 ºC
Work stress	400 Vac
Thermal power dissipated	68 W
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-22:2007 UNE-EN 62208:2012
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
In accordance with the Telecommunications Regulations (ICT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging


Unit EAN code	8423220272323
EAN code container	8423220272323
Units packaging	1
Units carton	1
Pallet Units	15
Tariff code	85371098

Sketch

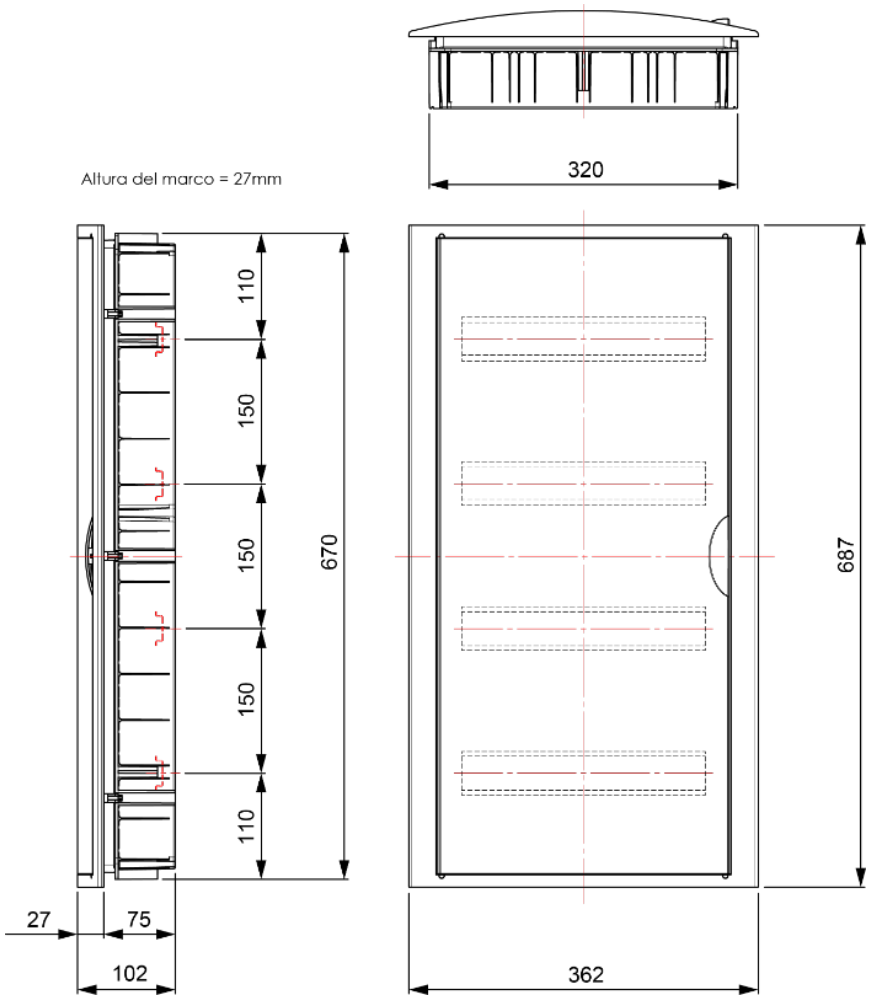

5270ICTHGW

Sketch

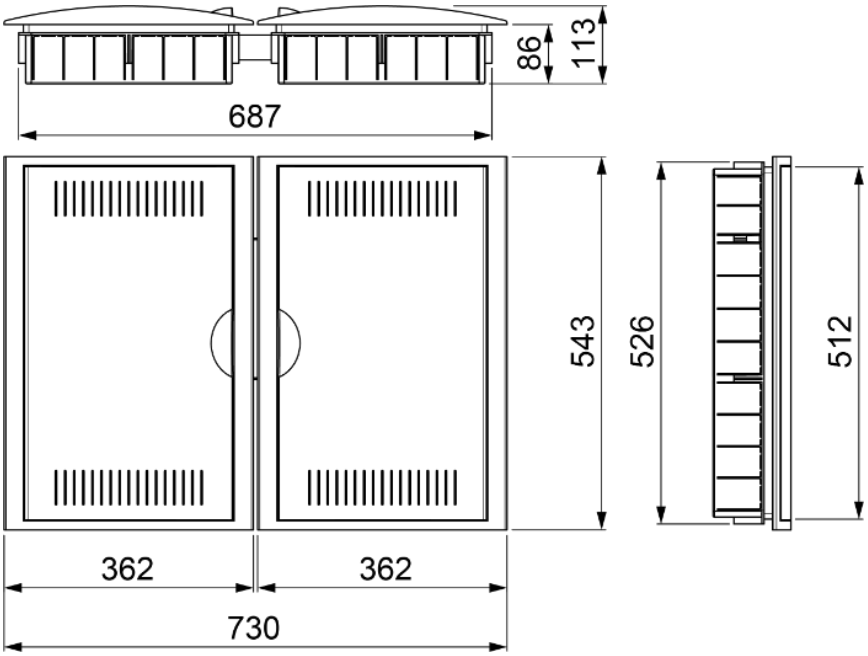

Documentation and downloads

- Assembly instructions (2.09MB)
- Assembly instructions (1.94MB)
- Commercial doc. (3.42MB)
- Commercial doc. (0.34MB)
- Safety Information (0.38MB)
- Table of compatibilities: box, frame and door (0.06MB)
- Link options for enclosures (0.08MB)
- Dimensions table (0.15MB)
- Series replenishments (0.07MB)
- Distribution boards Arelos range (Solera) 2020
- Mounting distribution boards. Arelos range (Solera)

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com