

Flush connection box in hollow partition. 188 x 148 x 50 mm. Cover with screws. Fixing system with nylon ties.

Flush connection box in hollow partition. 188 x 148 x 50 mm. Cover with screws. Fixing system with nylon ties. 8 inputs for tube Ø 25 mm, 2 inputs for tube Ø 32 mm, 6 inputs for tube Ø 40 mm



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	188x148x50
Case material	Insulation
Case color	Blue
Cap color	White
Ticket type	Unfathomable
No. of inlets and size (mm)	8xØ25, 2xØ32, 6xØ40
Lid closure system	Metal screw
Fixing system to the hollow partition.	Metal claw
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
With recessed hole marking system	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C

Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/EU (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/EU (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220204676
EAN code container	8423220204676
EAN code packaging	18423220204673
Units packaging	1
Units carton	66
Pallet Units	990
Packaging Measures cm	59,5x39,5x59,5
Unit weight (g)	229
Container Weight (Kg)	0,234
Packaging Weight (Kg)	16,574
Tariff code	39259010

Sketch

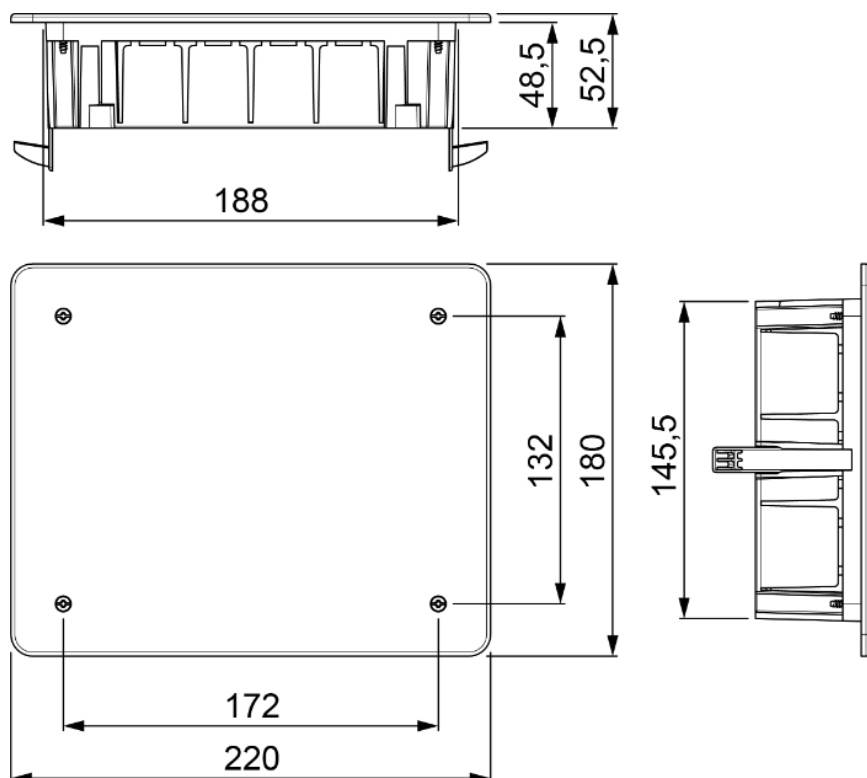

Documentation and downloads

-  Assembly instructions (2.94MB)
-  Safety Information (0.38MB)
-  Mounting back junction boxes for Dry wall (Solera)
-  Commercial doc. (3.42MB)
-  Back junction boxes for Dry wall (Solera)