

Flush connection box in hollow partition. 300 x 500 x 85 mm. Cover with screws.

Flush connection box in hollow partition. 300 x 500 x 85 mm. Cover with screws. Fixing system using multi-perforated support black colour. 50 inputs for Ø 40 mm tube.



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	300x500x85
Case material	Insulation
Case color	Blue
Cap color	White
Ticket type	Unfathomable
No. of inlets and size (mm)	50xØ40
Linkable	Vertically and horizontally
Lid closure system	Metal screw
Possibility of putting lock	Not
Fixing system to the hollow partition.	Multi-perforated support for hollow wall black colour.
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Fire resistance (GWEPT)	850 °C
-------------------------	--------

Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/EU (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/EU (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220262454
EAN code container	8423220262454
Units packaging	1
Units carton	5
Pallet Units	75
Packaging Measures cm	57,8x38,5x46
Unit weight (g)	1365
Container Weight (Kg)	1,379
Packaging Weight (Kg)	7,865
Tariff code	39259010

Sketch

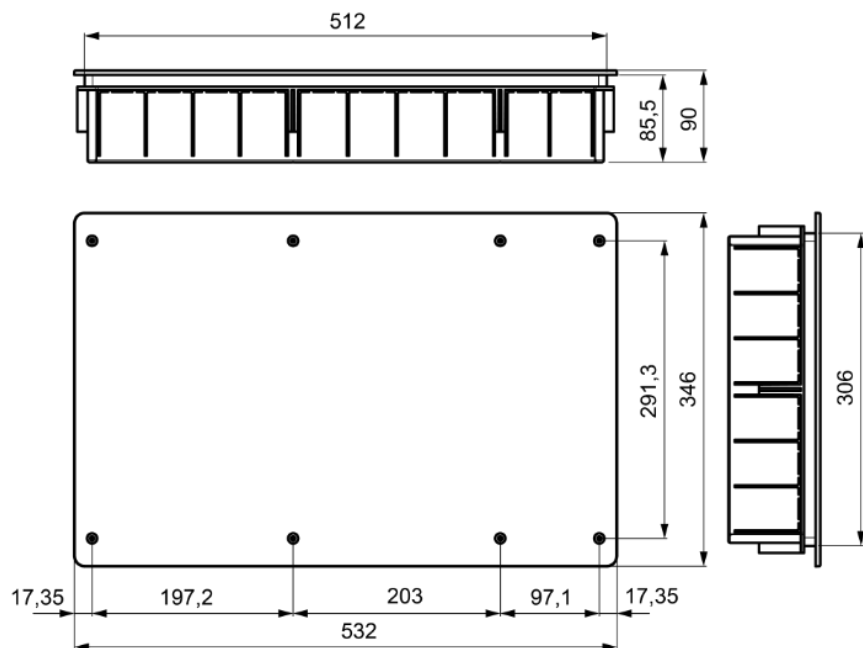

Documentation and downloads



Assembly instructions (5.17MB)



Commercial doc. (3.42MB)



Safety Information (0.38MB)