

## Flush connection box in hollow partition. Ø 100 mm.

Flush connection box in hollow partition. Ø 100 mm. Square leveling cover. Perimeter adjustment. With central screw. Depth 46 mm. 10 inputs for tube Ø 25 and 4 inputs for tube Ø 104 mm.



### Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	Ø 100x46
Case material	Insulation
Case color	Blue
Cap color	White
Ticket type	Unfathomable
No. of inlets and size (mm)	10xØ25
Lid closure system	Perimeter adjustment + screw
Fixing system to the hollow partition.	Metal claw
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

### Technical data

Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C

Work stress	400 Vac
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

## Logistics and packaging

Unit EAN code	8423220239463
EAN code container	8423220204683
EAN code packaging	18423220204680
Units packaging	4
Units carton	120
Pallet Units	1800
Packaging Measures cm	59,5x39,5x48
Unit weight (g)	100,2
Container Weight (Kg)	0,4008
Packaging Weight (Kg)	12,863
Tariff code	39259010

## Sketch

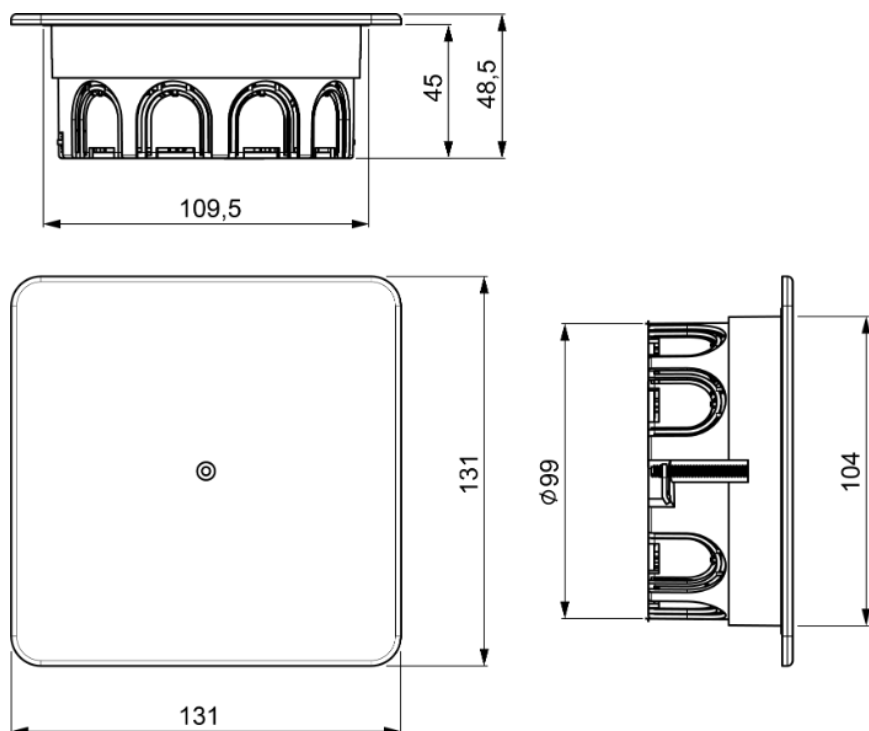

## Documentation and downloads



Assembly instructions (5.17MB)



Safety Information (0.38MB)



Commercial doc. (3.42MB)