

Flush connection box in hollow partition. Ø 150 mm. Square leveling cover. Perimeter adjustment. With central screw.

Flush connection box in hollow partition. Ø 150 mm. Square leveling cover. Perimeter adjustment. With central screw. Depth 46 mm. 14 inputs for tube Ø 25 and 4 inputs for tube Ø 32 mm.



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	Ø 150x46
Case material	Insulation
Case color	Blue
Cap color	White
Ticket type	Unfathomable
No. of inlets and size (mm)	14xØ25, 4xØ32
Lid closure system	Perimeter adjustment + screw
Fixing system to the hollow partition.	Metal claw
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70 °C

Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).


Logistics and packaging

Unit EAN code	8423220239487
EAN code container	8423220204706
EAN code packaging	18423220204703
Units packaging	4
Units carton	72
Pallet Units	1080
Packaging Measures cm	59,5x39,5x59,5
Unit weight (g)	201,8
Container Weight (Kg)	0,8172
Packaging Weight (Kg)	15,8396

Tariff code

39259010

Sketch

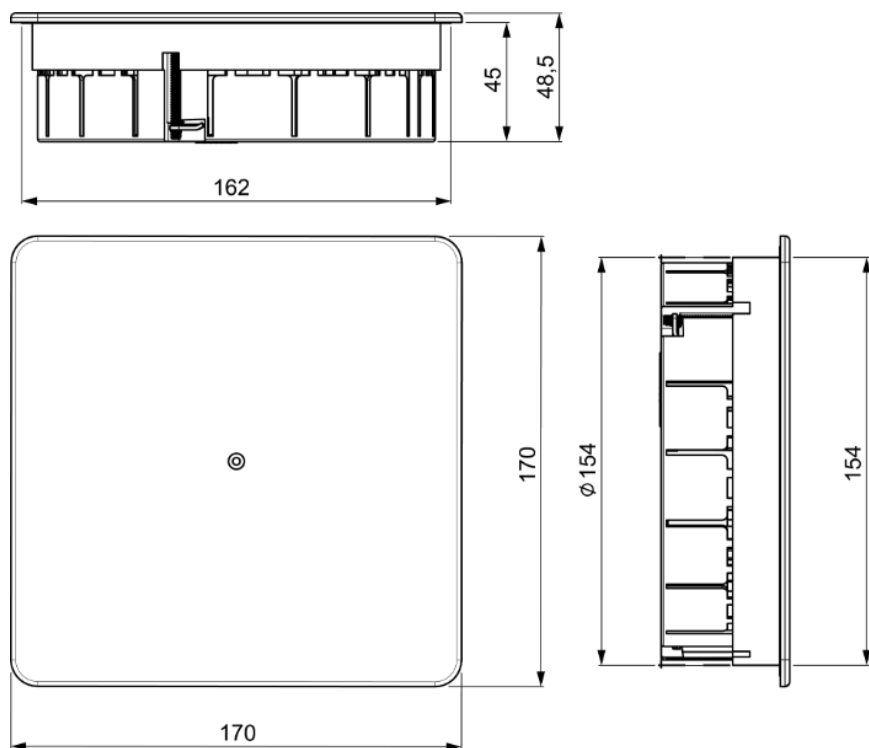

Documentation and downloads



Assembly instructions (5.17MB)



Commercial doc. (3.42MB)



Safety Information (0.38MB)