

Flush connection box in hollow partition. 170 x 112 mm. Cover with metal claw. Nylon ties fixing system.

Flush connection box in hollow partition. 170 x 112 mm. Cover with metal claw. Nylon ties fixing system. Depth 47 mm. 16 inputs for tube Ø 25 mm.



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	170x112x47
Case material	Insulation
Case color	Blue
Cap color	White
Ticket type	Unfathomable
No. of inlets and size (mm)	16xØ25
Lid closure system	Metal claw
Fixing system to the hollow partition.	Nylon flange
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
With recessed hole marking system	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac

Free of halogens	Yes
------------------	-----

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/EU (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/EU (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220236561
EAN code container	8423220201750
EAN code packaging	18423220201757
Units packaging	5
Units carton	110
Pallet Units	1320
Packaging Measures cm	59,5x39,5x64
Unit weight (g)	170,6
Container Weight (Kg)	0,863
Packaging Weight (Kg)	20,236
Tariff code	39259010

Sketch

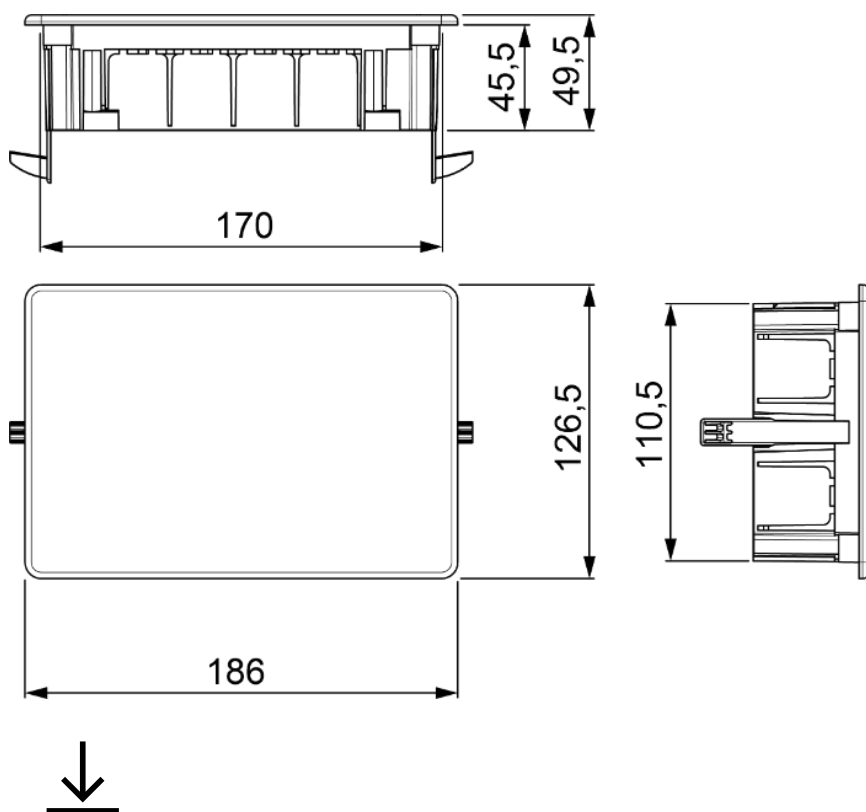

Documentation and downloads

-  [Assembly instructions \(2.94MB\)](#)
-  [Safety Information \(0.38MB\)](#)
-  [Commercial doc. \(3.42MB\)](#)
-  [Back junction boxes for Dry wall \(Solera\)](#)
-  [Mounting back junction boxes for Dry wall \(Solera\)](#)