

Flush mechanism box in hollow partition. For 1 module. Fixing with metal claws.

Flush mechanism box in hollow partition. For 1 module. Fixing with metal claws. Flush dimensions \varnothing 68 x 46 mm. 4 entries for \varnothing 20 mm conduit and 2 entries for \varnothing 25 mm conduit. Use \varnothing 68 mm hole saw. Black colour. Linkable.



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	\varnothing 68x46
Case material	Insulation
Case color	Black
Ticket type	Unfathomable
No. of inlets and size (mm)	4x \varnothing 20, 2x \varnothing 25,
Linkable	Linkable to each other
Fixing system to the hollow partition.	Short metal claw
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Lightening torque	0.30 - 0.40 Nm

Technical data

Fire resistance (GWEPT)	850 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220236592
EAN code container	8423220007215
EAN code packaging	18423220007212
Units packaging	20
Units carton	520
Pallet Units	7800
Packaging Measures cm	59,5x39,5x59,5
Unit weight (g)	31
Container Weight (Kg)	0,62
Packaging Weight (Kg)	17,068
Tariff code	39259010

Sketch

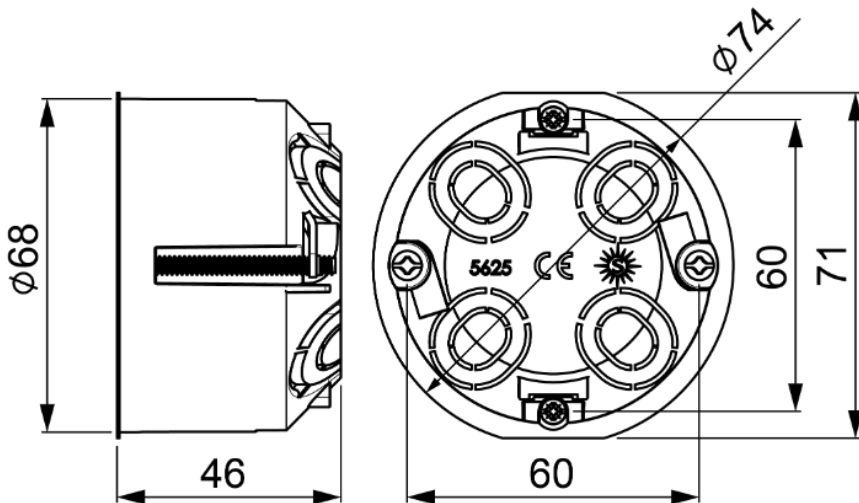

Documentation and downloads



Assembly instructions (3.63MB)



Commercial doc. (3.42MB)



Safety Information (0.38MB)



Mechanism boxes for dry wall, Blue range (Solera)



Mounting mechanism boxes for dry wall (Solera)