

Flush mechanism box in hollow partition. For 1 module. Fixing with metal claws.

Flush mechanism box in hollow partition. For 1 module. Fixing with metal claws. Flush dimensions \varnothing 68 x 60 mm. 4 entries for \varnothing 20 mm conduit and 2 entries for \varnothing 25 mm conduit. Use \varnothing 68 mm hole saw. Blue colour.



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	\varnothing 68x60 mm
Case material	Insulation
Case color	Blue
Ticket type	Unfathomable
No. of inlets and size (mm)	4 entradas para tubo \varnothing 20mm y 2 entradas para tubo \varnothing 25mm
Linkable	Vertically and horizontally
Fixing system to the hollow partition.	Metal claw
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Lightening torque	0.30 - 0.40 Nm

Technical data

Fire resistance (GWEPT)	850 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronic Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220245686
EAN code container	8423220245686
Units packaging	10
Units carton	320
Pallet Units	4800
Packaging Measures cm	59,5x37,5x49
Unit weight (g)	32,5
Container Weight (Kg)	0,325
Packaging Weight (Kg)	11,21
Tariff code	39259010

Sketch

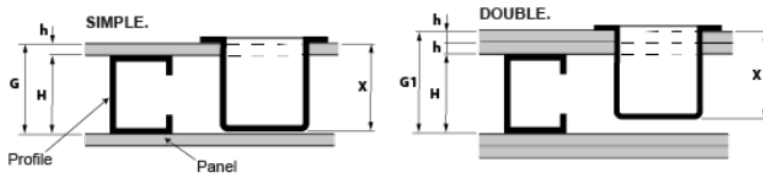
DIAGRAMS CHARACTERISTICS OF HOLLOW PARTITION ENGLISH


STANDARD PROFILES & PANELS

PROFILES	H	34	46	70	90	125
PANELS	h	11	13	15	19	

• Ref. 5625A


It can be mounted with minimum profile and panel dimensions.



- 5625A box can be mounted as long as $G > X = 60$ mm

SIMPLE $G = (H+h) \quad 46 + 15 = 61$ mm.
 DOUBLE $G = (H+h+h) \quad 46+13+13 = 72$ mm.

SKETCH



ed 2



Documentation and downloads



Assembly instructions (3.63MB)



Safety Information (0.38MB)



Mounting mechanism boxes for dry wall (Solera)



Commercial doc. (3.42MB)



Mechanism boxes for dry wall, Blue range (Solera)