5625A

Flush mechanism box in hollow partition. For 1 module. Fixing with metal claws.



Flush mechanism box in hollow partition. For 1 module. Fixing with metal claws. Flush dimensions Ø 68 x 60 mm. 4 entries for Ø20 mm conduit and 2 entries for Ø25 mm conduit. Use Ø 68 mm hole saw. Blue colour.

Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	Ø 68x60 mm
Case material	Thermoplastic
Case color	Blue
Ticket type	Unfathomable
No. of inlets and size (mm)	4 entradas para tubo ø 20mm y 2 entradas para tubo ø 25mm
Linkable	Vertically and horizontally
Fixing system to the hollow partition.	Metal claw
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Lightening torque	0.30 - 0.40 Nm

Technical data

Fire resistance (GWEPT)	850 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	400 Vac
Free of halogens	Yes

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging


Unit EAN code	8423220245686
EAN code container	8423220245686
Units packaging	10
Units carton	320
Pallet Units	4800
Packaging Measures cm	59,5x37,5x49
Unit weight (g)	32,5
Container Weight (Kg)	0,325
Packaging Weight (Kg)	11,21
Tariff code	39259010

Sketch

5625A

DIAGRAMS CHARACTERISTICS OF HOLLOW PARTITION


ENGLISH

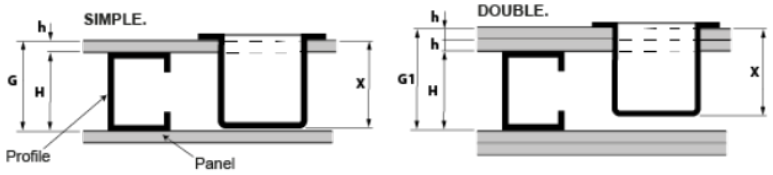

STANDARD PROFILES & PANELS						
PROFILES	H	34	46	70	90	125
PANELS	h	11	13	15	19	

- **Ref. 5625A**


It can be mounted with minimum profile and panel dimensions.



- 5625A box can be mounted as long as G>X=60 mm

SIMPLE G = (H+h) 46 + 15 = 61 mm.
DOUBLE G = (H+h+h) 46+13+13 = 72 mm.

SKETCH



ed 2

Documentation and downloads

- Assembly instructions (3.63MB)
- Commercial doc. (3.42MB)
- Safety Information (0.38MB)
- Mechanism boxes for dry wall, Blue range (Solera)
- Mounting mechanism boxes for dry wall (Solera)