MP56HGW

Flush distribution box in hollow walls of 56 modules. Metal-claw fixing Ref. G-MP28.



Flush distribution box in hollow walls of 56 modules. Fixing system using metal claws Ref. G-MP28. 4 rows. With white metal frame and door. Blue box and white cover, thermoplastic material. External dimensions 362 x 778 x 88 mm. Thermal dissipation 40 W.

Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
No. Modules (18 mm)	56
Modules per row	14
Removable frame	Yes
Metallic DIN profile	Yes
Dimensions outside (mm) (width x height x depth)	362X778X88
Dimensions gap (mm) (Width x Height x Depth)	333x752x88
Case material	Composite
Frame and door material	Metallic stainless
Case color	Blue
Cap color	White
Door color	White
Door opening	Horizontal
Battens included	Yes (Screw terminals)
Strip type	Ground
No. of terminals and size	28x6 mm2 + 6x16 mm2

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

MP56HGW

Ticket type	Unfathomable
Linkable	Vertically and horizontally
Lid closure system	1/4 turn screw without spring
Door closing system	Handle
Reversible door	Yes
Possibility of mounting strips	Yes (included)
Possibility of putting lock	Yes (not included)
Possibility of mounting DIN rail	Yes (included)
Possibility of mounting .PL-MP28 plate	Yes (not included)
Fixing system to the hollow partition.	Metal claw
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
With recessed hole marking system	Yes
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

Technical data

Protection Degree (IK)	IK07
Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	<1000 Vac ; 1500 Vdc
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 62208:2012
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes

According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220094475
EAN code container	8423220094475
EAN code packaging	18423220094472
Units packaging	1
Units carton	1
Pallet Units	36
Packaging Measures cm	79x37,5x11
Packaging Weight (Kg)	5,94
Tariff code	39259010

Sketch

MP56HGW

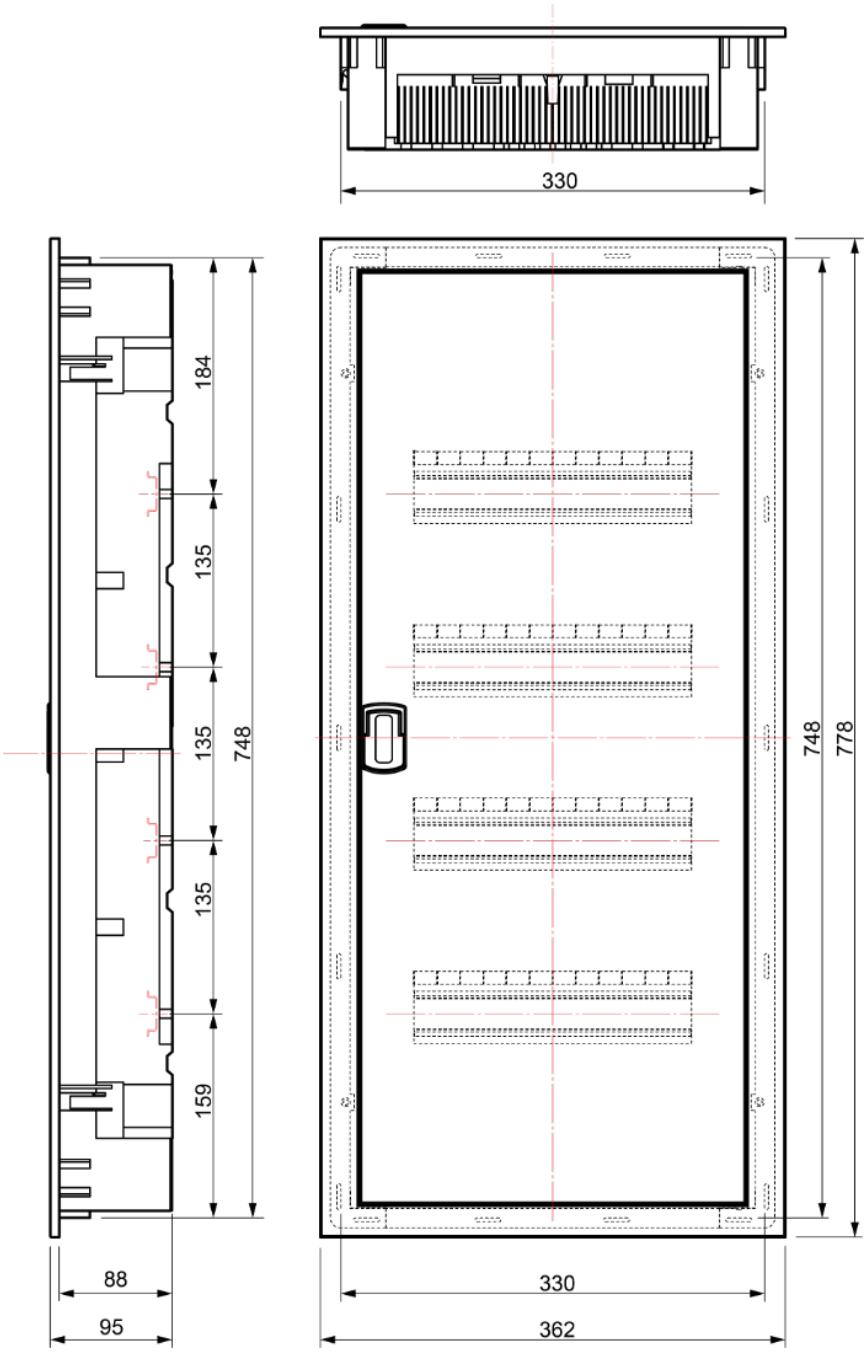

Documentation and downloads

- Assembly instructions (2.86MB)
- Assembly instructions (0.75MB)
- Commercial doc. (3.42MB)
- Commercial doc. (0.34MB)
- Safety Information (0.38MB)

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com