

## Connection sealed box without cones. Grey colour. IP65. External dimensions 362 x 362 x 140 mm. Internal dimensions 354x354x131 mm

Connection sealed box without cones. Grey colour. IP65. IK08. External dimensions 362 x 362 x 140 mm. Internal dimensions 354 x 354 x 131 mm. Smooth cover and lateral. With centricity points. Quick closure with stainless screws.



### Features

|  |  |
|--|--|
| Installation method                              | Surface  |
| Use  | Industrial   |
| Location type                                    | Exterior and interior  |
| Dimensions outside (mm) (width x height x depth) | 362x362x140  |
| Dimensions (mm)                                  | See sketch   |
| Case material                                    | Insulation   |
| Case color                                       | Grey (RAL7035)   |
| Cap color  | Grey (RAL 7035)  |
| Battens included                                 | No   |
| Ticket type                                      | With centricity points.  |
| Fixation System (For surface)                    | Ref.KIT1300SOP (not included). For all INDUBOX except for Ref. 1303 and 1304 |
| Sealable   | Yes  |
| Linkable   | Vertically and horizontally  |
| Lid closure system                               | Ultra-fast metal screw   |
| Possibility of mounting strips                   | Yes (not included)   |
| Possibility of mounting plate                    | Yes (not included)   |
| Possibility of mounting DIN rail                 | Yes (not included)   |
| Captive screw                                    | Yes  |
| Drain type                                       | Deflowable Drainage  |

|  |   |
|--|---|
| Possibility of mounting .PL-MP28 plate | Yes (not included)                                    |
| Captive Lid                            | Yes   |
| Valid for photovoltaic installations   | Yes   |
| Common applications                    | Industrial environments (factories, warehouses, etc.) |
| Additional dimensions (mm)             | See sketch  |

## Technical data

|                                  |                  |
|----------------------------------|------------------|
| Protection Degree (IK)           | IK08             |
| Impact shock resistance          | Strong           |
| Insulation class                 | Class II         |
| Fire resistance (GWEPT)          | 650 °C           |
| Heat resistance (Ball pressure)  | 70 °C            |
| Installation temperature         | -25 °C -> +60 °C |
| UV resistance                    | Yes              |
| Free of halogens                 | Yes              |
| Suitable for saline environments | Yes              |

## Regulations

|  |   |
|--|---|
| CE marking   | Yes   |
| UK marking   | Yes   |
| CMim marking   | Yes   |
| According to Regulations UNE/EN  | UNE-EN 60670-1:2022<br>UNE-EN 60670-22:2007 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes   |
| According to European Directive 2014/35 / EU. Low voltage directive    | Yes   |


## Sustainability

|  |   |
|--|---|
| According to European Directive 2011/65/EU (RoHS)  | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1    |
| According to European Directive 2012/19/EU (RAEE2) | Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II). |

## Logistics and packaging

|                       |                |
|-----------------------|----------------|
| Unit EAN code         | 8423220227453  |
| EAN code container    | 8423220227453  |
| EAN code packaging    | 18423220227450 |
| Units packaging       | 1              |
| Units carton          | 6              |
| Pallet Units          | 60             |
| Packaging Measures cm | 56x37,5x70,5   |
| Unit weight (g)       | 1674           |
| Container Weight (Kg) | 1,688          |
| Packaging Weight (Kg) | 11,104         |
| Tariff code           | 85381000       |

## Sketch

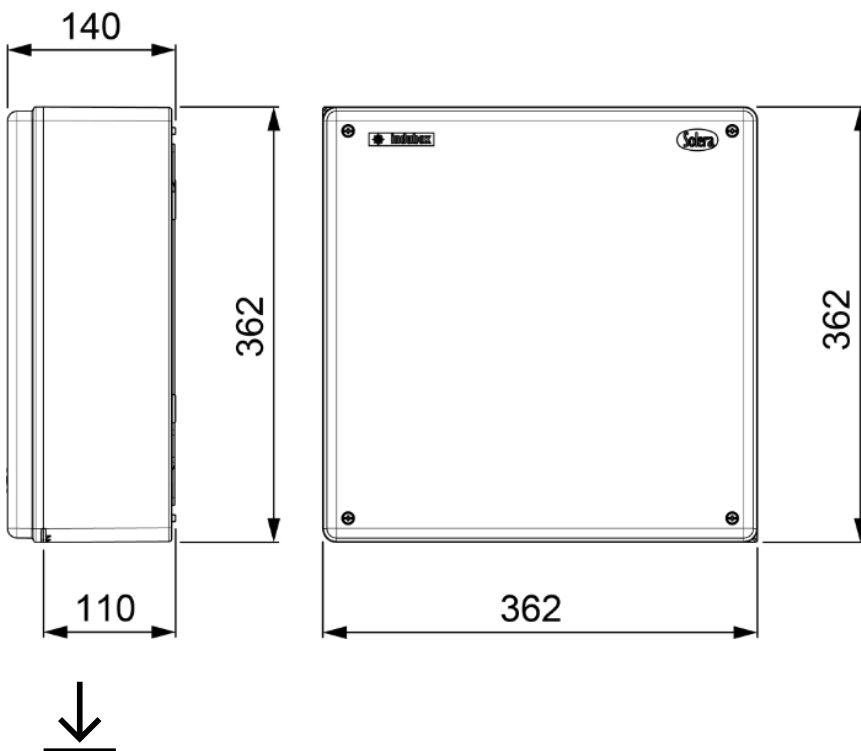

## Documentation and downloads



Assembly instructions (1.16MB)



Safety Information (0.38MB)



Series replenishments (0.05MB)



Industrial cabinets IP65, IK08 (Solera) (Ed. 2024)