

**Connection sealed box without cones. Grey colour. External dimensions 362x500x140 mm
Internal dimensions 355x49x29 mm**

Connection sealed box without cones. Grey colour. IP65. IK08. External dimensions 362x500x140 mm. Internal dimensions 355 x 493 x 129 mm. Quick closure with stainless screws. Smooth lateral. With centricity points



Features

Installation method	Surface
Use	Industrial
Location type	Exterior and interior
Dimensions outside (mm) (width x height x depth)	362x500x140
Dimensions inside (mm) (Width x Height x Depth)	355x493x129
Case material	Thermoplastic
Case color	Grey (RAL7035)
Cap color	Grey (RAL 7035)
Battens included	No
Ticket type	With centricity points.
Fixation System (For surface)	Ref.KIT1300SOP (not included). For all INDUBOX except for Ref. 1303 and 1304
Sealable	Yes
Linkable	Vertically and horizontally
Lid closure system	Ultra-fast metal screw
Possibility of mounting strips	Yes (not included)
Possibility of mounting plate	Yes (not included)
Possibility of mounting DIN rail	Yes (not included)
Valid for photovoltaic installations	Yes

Common applications	Industrial environments (factories, warehouses, etc.)
---------------------	---

Technical data

Protection Degree (IK)	IK08
Impact shock resistance	Strong
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
UV resistance	Yes
Free of halogens	Yes
Suitable for saline environments	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE-EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
APPlus certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability


According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220044951
---------------	---------------

EAN code container	8423220044951
EAN code packaging	18423220044958
Units packaging	1
Units carton	5
Pallet Units	50
Packaging Measures cm	56x37,5x70,5
Unit weight (g)	2371,8
Container Weight (Kg)	2,3858
Packaging Weight (Kg)	13,124
Tariff code	85381000

Sketch

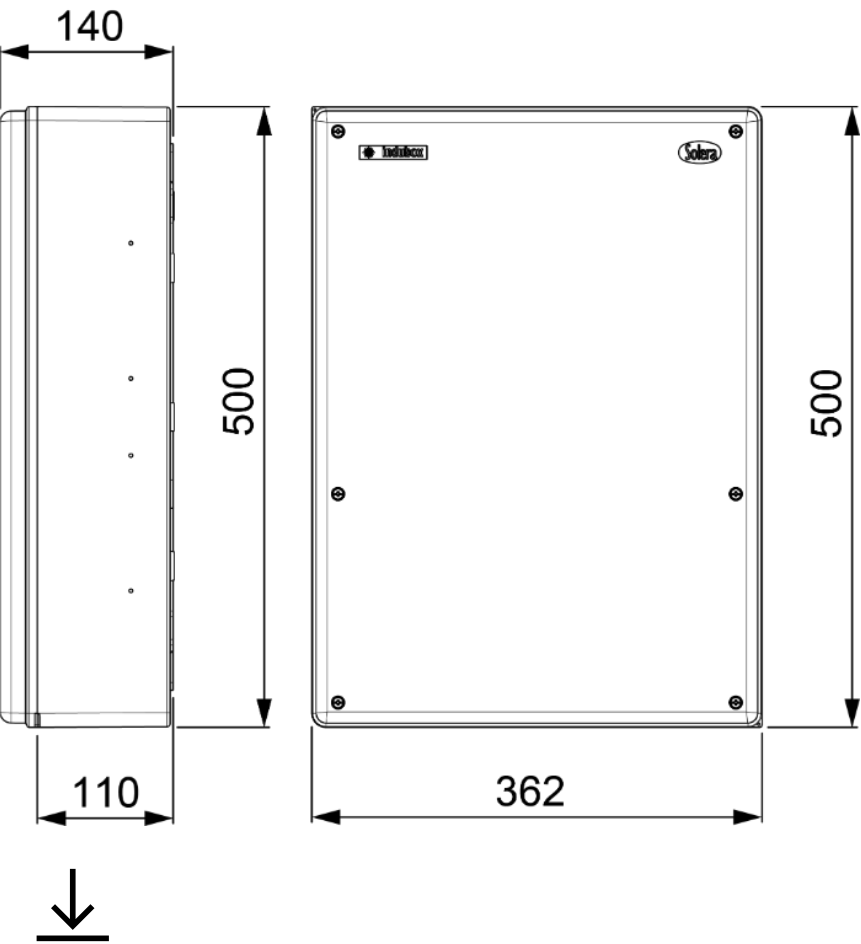

Documentation and downloads

 Assembly instructions (1.16MB)

 Safety Information (0.38MB)



Certificate (0.48MB)



Series replenishments (0.05MB)



Industrial cabinets IP65, IK08 (Solera) (Ed. 2024)