

## Sealed connection box without cones. Grey colour and transparent cover. With neutral switch In 160A.

Sealed connection box without cones. Grey colour and transparent cover. With neutral switch In 160A.IP65. IK07. Internal dimensions 153 x 110 x 65 mm. 1/4 turn screw closure. Sealable



## Features

Installation method	Surface
Use	Domestic / Tertiary
Location type	Exterior and interior
Dimensions outside (mm) (width x height x depth)	160x120x71
Dimensions inside (mm) (Width x Height x Depth)	153x110x65
Case material	Insulation
Case color	Grey (RAL7035)
Cap color	Grey (RAL 7035)
Ticket type	Smooth sides (machining inlets)
Fixation System (For surface)	Exterior
Sealable	Yes
Lid closure system	1/4 turn screw with spring
Possibility of mounting strips	Yes (not included)
Captive screw	Yes
Captive Lid	Yes
Valid for photovoltaic installations	Yes
Common applications	Industrial environments (factories, warehouses, etc.)

## Technical data

Protection Degree (IK)	IK08
Impact shock resistance	Strong
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	<1000 Vac ; 1500 Vdc
UV resistance	Yes
Free of halogens	Yes

## Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

## Sustainability


According to European Directive 2011/65/UE (RoHS)	Yes
According to European Directive 2012/19/UE (RAEE2)	Yes
According to Regulations (RoHS)	UNE-EN IEC 63000:2022

## Logistics and packaging

Unit EAN code	8423220064904
EAN code container	8423220064904
EAN code packaging	18423220064901
Units packaging	1

Units carton	27
Pallet Units	945
Packaging Measures cm	59,5x37,5x20
Unit weight (g)	383,4
Container Weight (Kg)	0,3834
Packaging Weight (Kg)	10,9318
Tariff code	85381000

## Sketch

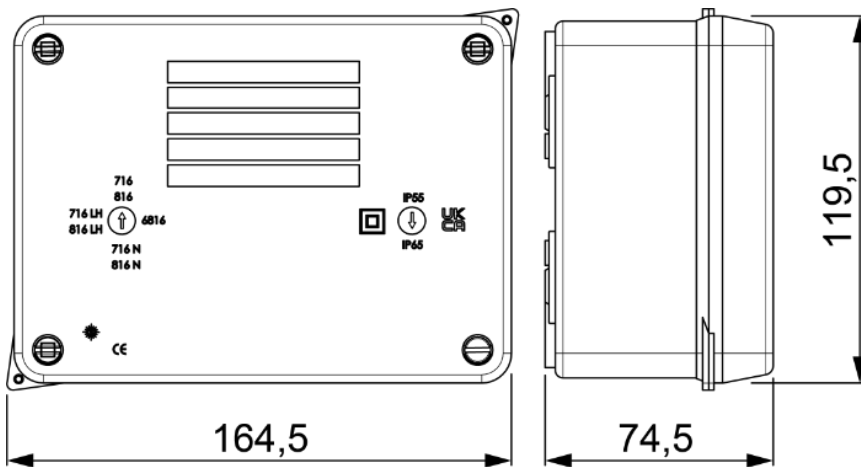

## Sketch

# SECCIONADOR NEUTRO



## Documentation and downloads

-  Safety Information (0.38MB)
-  Junction boxes IP65/55, IK07-08-09 (Solera)
-  Mounting junction boxes (Solera)