

Flush steel distribution cabinet, 132 modules (4×33)

Flush-mounted steel distribution cabinet for 132 modules (4×33) for indoor switchboards in homes, offices and retail. IP30 and IK09; 1 mm painted steel with adjustable recess depth 140–165 mm. Reversible door and removable chassis simplify wiring, upgrades and servicing. Supplied with 35 mm DIN rail plus earth and neutral terminals. Recess size 707×735 mm.



Features

| | |
|--|--|
| Installation method | Flush in work |
| Use | Domestic / Tertiary |
| Location type | Inside |
| No. Modules (18 mm) | 132 |
| Modules per row | 33 |
| Removable frame | Yes |
| Metallic DIN profile | Yes |
| Dimensions outside (mm) (width x height x depth) | 707 x 735 x (140–165) |
| Case material | Metallic |
| Frame and door material | Metallic |
| Case color | White |
| Cap color | White |
| Door color | White |
| Door opening | Horizontal |
| Battens included | Yes (Screw terminals) |
| Strip type | Neutral + Ground |
| No. of terminals and size | TT (2x25 mm ² + 58x16 mm ²) + N (2x25 mm ² + 28x16 mm ²) |
| Ticket type | Unfathomable |
| Sealable | Not |
| Lid closure system | 1/4 turn screw without spring |

| | |
|---------------------------------------|---|
| Door closing system | Handle |
| Reversible door | Yes |
| Possibility of mounting strips | Yes (included) |
| Possibility of putting lock | Yes (not included) |
| Separate covers or doors on the boxes | Yes |
| Possibility of mounting DIN rail | Yes (included) |
| Common applications | Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.) |

Technical data

| | |
|-------------------------------|----------------------|
| Protection Degree (IK) | IK09 |
| Impact shock resistance | Medium |
| Insulation class | Class I |
| Fire resistance (GWEPT) | 650 °C |
| Ambient operating temperature | -5 °C ; +60 °C |
| Work stress | <1000 Vac ; 1500 Vdc |
| Free of halogens | Yes |

Regulations

| | |
|--|--|
| CE marking | Yes |
| UK marking | Yes |
| CMim marking | Yes |
| According to Regulations | UNE-EN 62208: 2012 |
| According to Regulations UNE/EN | UNE-EN 61439-1: 2021 UNE-EN 61439-3: 2012 UNE-EN 61439-4: 2013 |
| In accordance with the Low Voltage Electrotechnical Regulations (REBT) | Yes |
| According to European Directive 2014/35 / EU. Low voltage directive | Yes |

Sustainability

| | |
|---|--|
| According to European Directive 2011/65/EU (RoHS) | The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1 |
|---|--|


According to European Directive 2012/19/UE (RAEE2)

Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

| | |
|-----------------------|----------------|
| Unit EAN code | 8423220081291 |
| EAN code container | 8423220081291 |
| EAN code packaging | 18423220081298 |
| Units packaging | 1 |
| Units carton | 1 |
| Pallet Units | 8 |
| Packaging Measures cm | 80,5x75,5x15,5 |
| Packaging Weight (Kg) | 18,87 |
| Tariff code | 85371098 |

Sketch

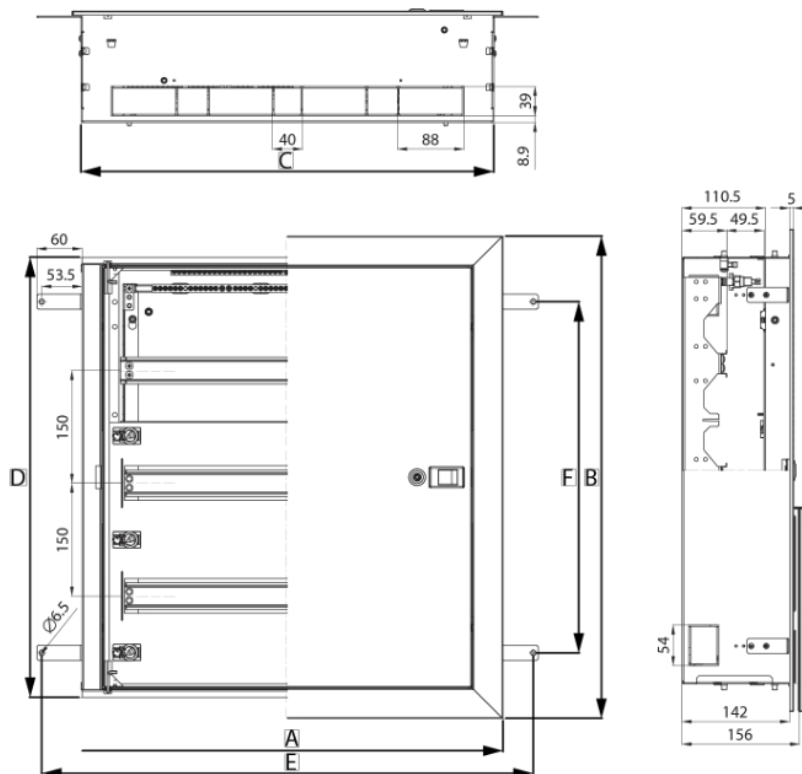

Sketch

| | A | B | C | D | E | F |
|----------|-----|-------|-----|-------|-----|-----|
| M3E72-1 | 572 | 642 | 545 | 585 | 651 | 467 |
| M4E96-1 | 572 | 792 | 545 | 735 | 651 | 617 |
| M5E120-1 | 572 | 942 | 545 | 885 | 651 | 767 |
| M6E144-1 | 572 | 1 092 | 545 | 1 035 | 651 | 917 |
| M4E132-1 | 734 | 792 | 707 | 735 | 813 | 617 |
| M5E165-1 | 734 | 942 | 707 | 885 | 813 | 767 |
| M6E198-1 | 734 | 1 092 | 707 | 1 035 | 813 | 917 |



Documentation and downloads



Assembly instructions (5.89MB)



Safety Information (0.38MB)



Series replenishments (0.06MB)