
ERP72NU

Horizontal frame for 2 mechanisms. Black frame and pearl ring.

Horizontal frame for 2 mechanisms. Black frame and pearl ring.Dimensions 154 x 81 x 10 mm.

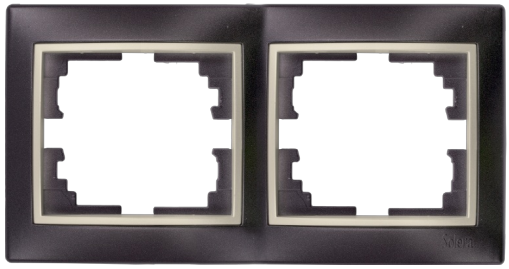

Features

Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)
Mechanism type	Frame
Type of installation	Flush
Dimensions	154 x 81 x 10
Frame color	Black + Pearl
Position	Horizontal
No. of elements	For 2 Elements

Technical data

Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-22:2007
In accordance with the Low Voltage Electrotechnical Regulations (REBT)	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220076877
EAN code container	8423220077232
EAN code packaging	18423220077239
Units packaging	10
Units carton	120
Pallet Units	5400
Packaging Measurements cm	17x12x10
Packaging Measures cm	38x18,5x42
Unit weight (g)	33
Container Weight (Kg)	0,4232
Packaging Weight (Kg)	5,6204
Tariff code	85366990

Sketch

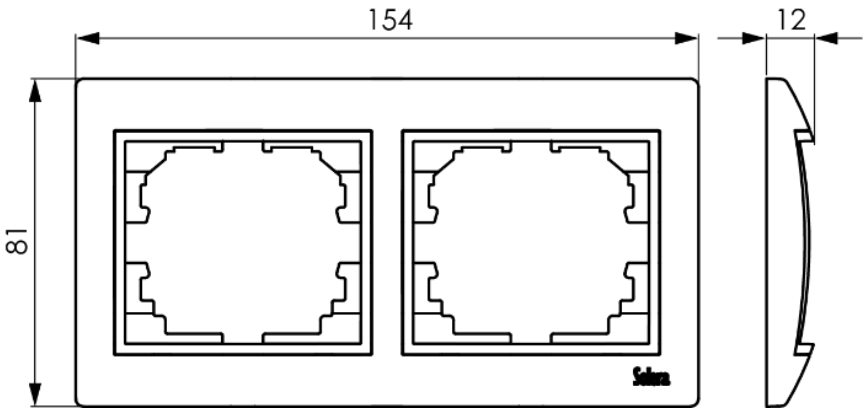

Documentation and downloads

ERP72NU

Safety Information (0.38MB)

Assembly flush switches form Europa range (Solera)

Portalámparas y Accesorios Solera S.A.U. Pol. Ind. Fuente del Jarro C/ Villa de Madrid, 53 46988 Paterna (Valencia) España
+34 961 322 301 | solera@psolera.com | www.psolera.com