


Blind cover.

Blind cover.Flush. White colour. Without frame.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

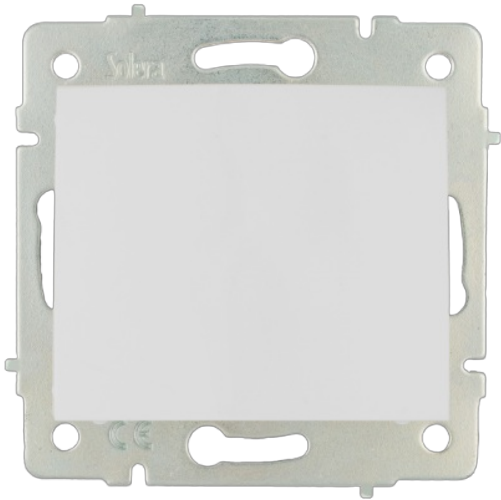

Features

Mechanism type	Blind cover
Type of installation	Flush
Nominal voltage	250V~ (50/60 Hz)

Technical data

Protection Degree (IP)	IP40
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	70/125 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-22:2007
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220086067
EAN code container	8423220085091
EAN code packaging	18423220085098
Units packaging	10
Units carton	120
Pallet Units	4320
Packaging Measurements cm	25,2x8x14
Packaging Measures cm	44,5x32,2x26,8
Unit weight (g)	69
Container Weight (Kg)	0,83
Packaging Weight (Kg)	10,62
Tariff code	85366990

Documentation and downloads

-  [Assembly instructions \(0.58MB\)](#)
-  [Mechanism scheme table \(0.91MB\)](#)
-  [Assembly flush switches form Europa range \(Solera\)](#)
-  [Commercial doc. \(3.28MB\)](#)
-  [Flush switches of Eruopa range \(Solera\)](#)