

Socket 2P+E, 16A 250V~ + Double 2-way switch
10AX 250V~. Surface.

Socket 2P+E, 16A 250V~ + Double 2-way switch 10AX 250V~. Surface. Graphite colour. Dimensions 138 x 72 x 42 mm. Inputs for 10x16, 10x20 and 16x16 mm mini-trunking. Screw connection.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Mechanism type	switch + fixed base
Type of installation	Surface
Rated current	10AX
Nominal voltage	250V~ (50/60 Hz)
Connection type	Screw connection
Mini trunking input	Yes
Type of operation	Rocker key
Dimensions	138 x 72 x 42
Monobloc (with frame included)	Yes
Frame color	Graphite

Technical data

Protection Degree (IP)	IP20
Fire resistance (GWEPT)	750/850 °C
Installation temperature	-5 °C -> +60 °C
Free of halogens	Yes

Regulations

CE marking	Yes
------------	-----

According to Regulations UNE/EN	UNE-EN 60669-1:2018 UNE 20315-1-1:2017 UNE-20315-1-2:2017
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220263536
EAN code container	8423220263529
Units packaging	10
Units carton	120
Pallet Units	4800
Tariff code	85366990

Sketch

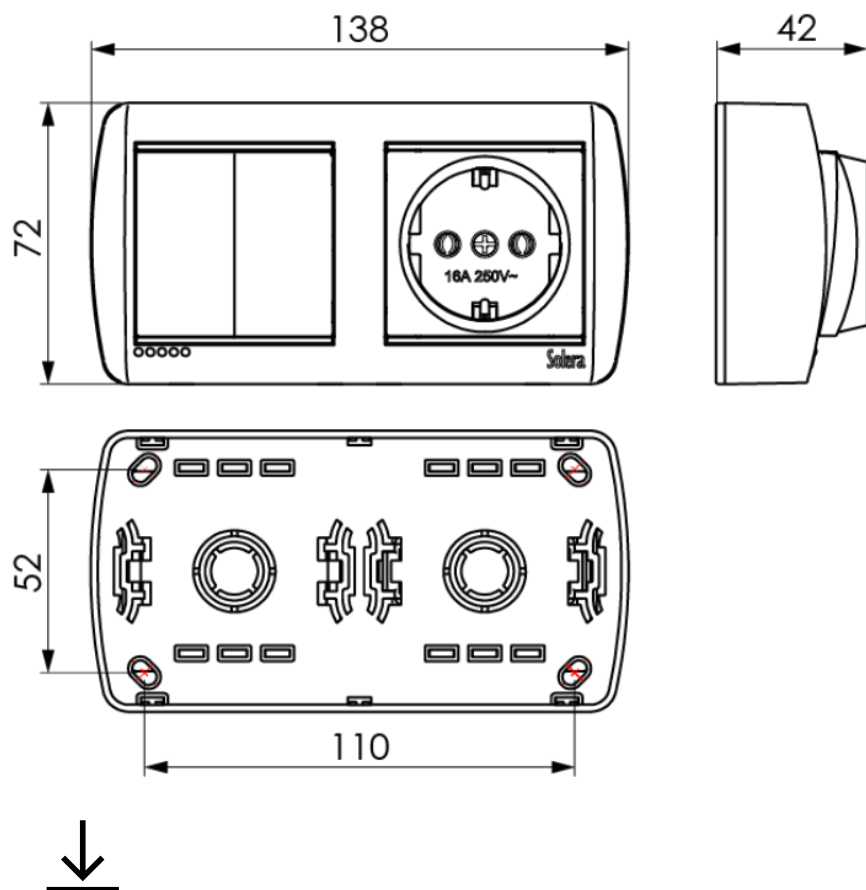

Documentation and downloads

- | | | | |
|--|--|---|---|
|  | Assembly instructions (0.58MB) |  | Commercial doc. (3.58MB) |
|  | Mechanism scheme table (0.85MB) |  | Surface switches Mural range (Solera) |
|  | Assembly surface switches Mural range (Solera) | | |