

Socket 2P+E (French), 16A 250V ~ + 2-way switch
10AX 250V~. Surface.

Socket 2P+E (French), 16A 250V ~ + 2-way switch 10AX 250V~. Surface. Graphite colour. Dimensions 138 x 72 x 42 mm. Inputs for 10x16, 10x20 and 16x16 mm mini-trunking. Screw connection.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Mechanism type	switch + fixed base
Type of installation	Surface
Nominal voltage	250V~ (50/60 Hz)
Connection type	Screw connection
Mini trunking input	Yes
Type of operation	Rocker key
Dimensions	138 x 72 x 42
Monobloc (with frame included)	Yes
Frame color	Graphite

Technical data

Protection Degree (IP)	IP20
Fire resistance (GWEPT)	750/850 °C
Installation temperature	-5 °C -> +60 °C
Free of halogens	Yes

Regulations

CE marking	Yes
CMim marking	Yes
According to Regulations	NF C61-314

According to Regulations UNE/EN	UNE-EN 60669-1:2018 UNE 20315-1-1:2017 UNE-20315-1-2:2017
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220263628
EAN code container	8423220263611
Units packaging	10
Units carton	120
Pallet Units	5760
Packaging Measurements cm	16x8x18
Packaging Measures cm	49,5x34x19
Unit weight (g)	65
Container Weight (Kg)	0,78
Packaging Weight (Kg)	10,01
Tariff code	85366990

Sketch

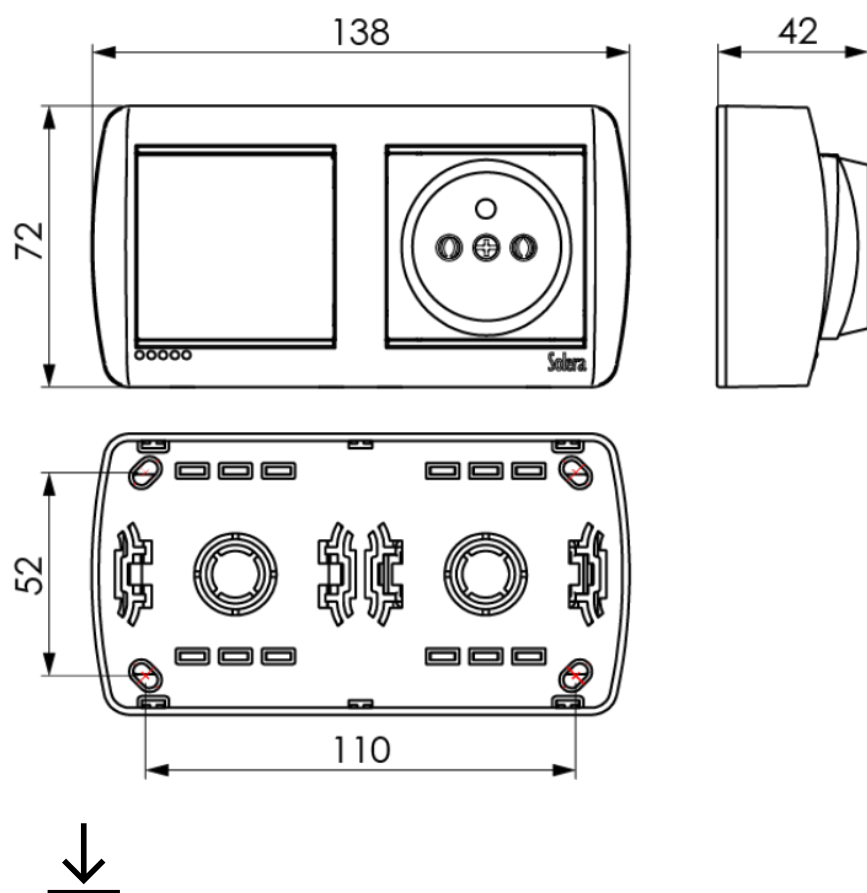

Documentation and downloads

- | | | | |
|--|--|---|---|
|  | Assembly instructions (0.58MB) |  | Commercial doc. (3.58MB) |
|  | Mechanism scheme table (0.85MB) |  | Surface switches Mural range (Solera) |
|  | Assembly surface switches Mural range (Solera) | | |